


Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

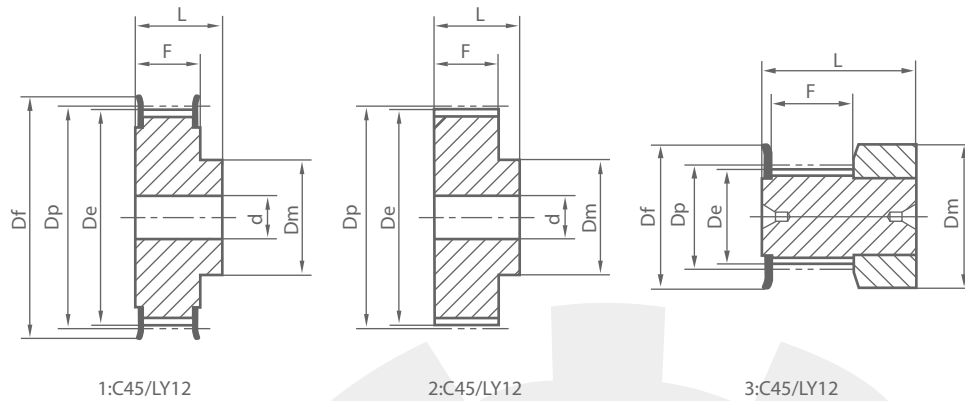

MXL025 PITCH 0.080" (2.032mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
16MXL025F	3	16	9.84	10.35	15	15	8.5	16	-
18MXL025F	3	18	11.12	11.64	16	16	8.5	16	-
20MXL025F	3	20	12.43	12.94	16	16	8.5	16	-
22MXL025	1	22	13.72	14.23	19.5	10	11	16	3
24MXL025F	1	24	15.01	15.52	20	10	11	16	3
28MXL025F	1	28	17.60	18.11	25	11	11	16	3
30MXL025F	1	30	18.90	19.40	25	12	11	16	4
32MXL025F	1	32	20.19	20.70	26	14	11	16	4
36MXL025F	1	36	22.78	23.29	28	16	11	16	4
40MXL025F	1	40	25.37	25.87	32	18	11	16	4
42MXL025F	1	42	26.67	27.17	32	18	11	16	5
44MXL025F	1	44	27.95	28.46	36	18	11	16	5
48MXL025	2	48	30.54	31.05	-	20	11	16	5
60MXL025	2	60	38.30	38.81	-	24	11	16	5
72MXL025	2	72	46.06	46.57	-	25	11	16	6




All series of specifications
can be sold off-the shelf,
immediate delivery.
Fast and convenient.
Please contact us
directly.



Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

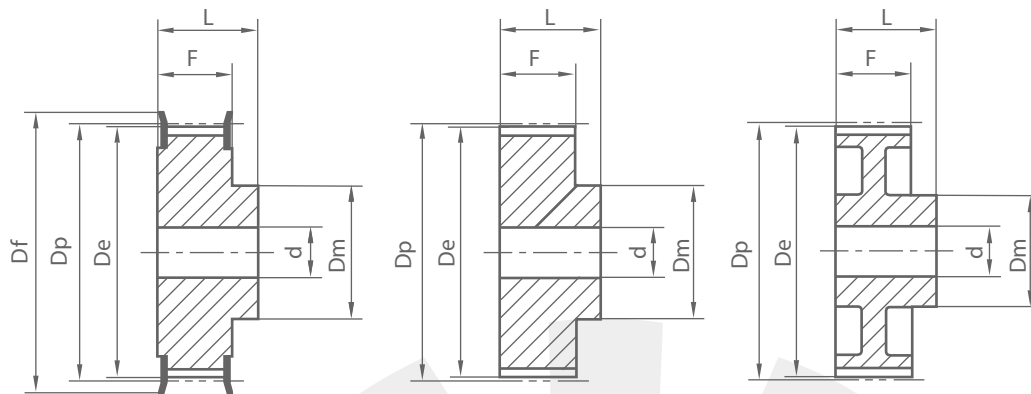

1:C45/LY12

2:C45/LY12

3:C45/LY12


XL037 PITCH 1/5" (5.08mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
10XL037F	1	10	15.66	16.17	23	10.0	14.3	20	—
11XL037F	1	11	17.28	17.79	23	10.0	14.3	20	—
12XL037F	1	12	18.90	19.41	25	10.0	14.3	20	—
13XL037F	1	13	20.51	21.02	28	10.0	14.3	20	—
14XL037F	1	14	22.13	22.64	28	16.0	14.3	20	—
15XL037F	1	15	23.75	24.26	28	16.0	14.3	20	—
16XL037F	1	16	25.36	25.87	32	16.0	14.3	20	—
17XL037F	1	17	26.98	27.49	35	20.0	14.3	20	—
18XL037F	1	18	28.60	29.11	35	20.0	14.3	20	—
19XL037F	1	19	30.22	30.73	38	20.0	14.3	22	—
20XL037F	1	20	31.83	32.34	38	25.0	14.3	22	—
21XL037F	1	21	33.45	33.96	38	25.0	14.3	22	—
22XL037F	1	22	35.07	35.57	41	25.0	14.3	22	—
23XL037F*	1	23	36.68	37.19	41	25.0	14.3	22	—
24XL037F	1	24	38.30	38.81	44	30.0	14.3	22	—
25XL037F*	1	25	39.92	40.43	44	30.0	14.3	22	8
26XL037F	1	26	41.53	42.04	48	30.0	14.3	22	8
27XL037F	1	27	43.15	43.66	48	34.0	14.3	22	8
28XL037F	1	28	44.77	45.28	51	34.0	14.3	22	8
29XL037F*	1	29	46.39	46.90	51	34.0	14.3	22	8
30XL037F	1	30	48.00	48.51	54	38.0	14.3	22	8
32XL037F	1	32	51.24	51.74	57	38.0	14.3	25	8
34XL037F	1	34	54.47	54.98	61	38.0	14.3	25	8
35XL037F	1	35	56.09	56.60	61	38.0	14.3	25	8
36XL037F	2	36	57.70	58.21	—	45.0	14.3	25	8
38XL037F	2	38	60.94	61.45	—	45.0	14.3	25	8
39XL037F*	2	39	62.56	63.07	—	45.0	14.3	25	8
40XL037F	2	40	64.17	64.68	—	45.0	14.3	25	8
42XL037F	2	42	67.41	67.91	—	45.0	14.3	25	8
44XL037	2	44	70.64	71.15	—	45.0	14.3	25	8
45XL037*	2	45	72.26	72.77	—	45.0	14.3	25	10
48XL037	2	48	77.11	77.62	—	45.0	14.3	25	10
52XL037	2	52	83.58	84.09	—	45.0	14.3	25	10
56XL037*	2	56	90.04	90.55	—	45.0	14.3	25	10
57XL037*	2	57	91.66	92.17	—	45.0	14.3	25	10
60XL037	2	60	96.51	97.02	—	45.0	14.3	25	10
68XL037*	2	68	109.45	109.96	—	45.0	14.3	25	10
70XL037*	2	70	112.68	113.19	—	45.0	14.3	25	10
72XL037	2	72	115.92	116.43	—	45.0	14.3	25	10

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

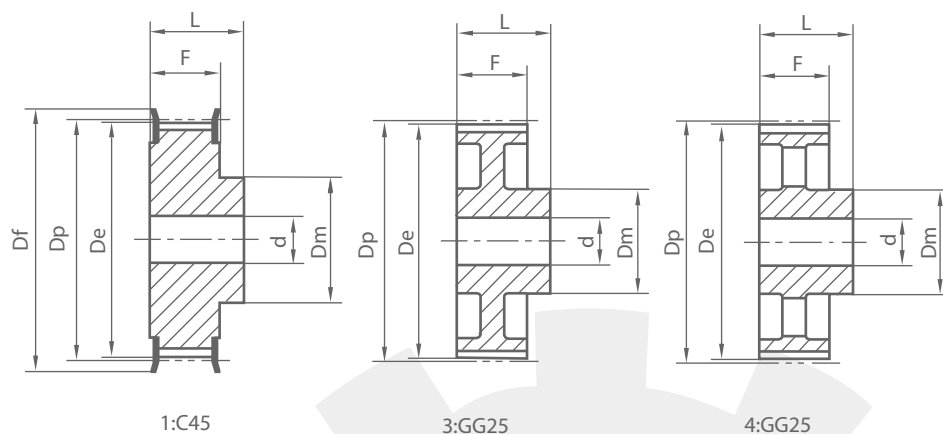


L050 PITCH 3/8" (9.525mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
10L050F	1	10	29.56	30.33	37	20	19	28	8
11L050F	1	11	32.59	33.35	37	24	19	30	8
12L050F	1	12	35.62	36.37	43	24	19	30	8
13L050F	1	13	38.65	39.41	43	28	19	30	8
14L050F	1	14	41.68	42.44	48	28	19	30	8
15L050F	1	15	44.72	45.48	51	34	19	30	8
16L050F	1	16	47.75	48.51	54	36	19	32	8
17L050F	1	17	50.78	51.54	57	36	19	32	10
18L050F	1	18	53.81	54.59	60	40	19	32	10
19L050F	1	19	56.84	57.61	63	40	19	32	10
20L050F	1	20	59.88	60.63	67	40	19	32	10
21L050F	1	21	62.91	63.68	70	45	19	32	10
22L050F	1	22	65.94	66.70	75	45	19	32	10
23L050F	1	23	68.97	69.73	79	55	19	32	10
24L050F	1	24	72.00	72.77	79	55	19	32	10
25L050F	1	25	75.04	75.80	83	58	19	32	10
26L050F	1	26	78.07	78.84	87	58	19	32	12
27L050F	1	27	81.10	81.86	91	58	19	32	12
28L050F	1	28	84.13	84.89	91	58	19	32	12
30L050F	1	30	90.20	90.96	97	70	19	32	12
32L050F	1	32	96.26	97.03	102	70	19	32	12
33L050F	1	33	99.29	100.05	112	70	19	32	12
34L050F	1	34	102.32	103.08	115	70	19	32	12
35L050F	1	35	105.35	106.12	115	70	19	32	12
36L050F	1	36	108.39	109.14	120	70	19	32	12
40L050F	1	40	120.51	121.29	128	70	19	32	12
42L050F	1	42	126.57	127.34	135	70	19	32	12
44L050F	1	44	132.64	133.40	142	70	19	32	12
45L050F	1	45	135.67	136.44	142	70	19	32	12
48L050F	1	48	144.77	145.54	150	70	19	32	12
50L050	3	50	150.83	151.60	—	70	19	32	14
52L050	3	52	156.90	157.66	—	70	19	32	14
56L050	3	56	169.02	169.76	—	70	19	32	14
57L050	3	57	172.06	172.82	—	70	19	32	14
60L050	3	60	181.15	181.92	—	75	19	42	14
68L050*	4	68	205.41	206.18	—	75	19	42	14
70L050*	4	70	211.47	212.24	—	75	19	42	14
72L050	4	72	217.53	218.29	—	75	19	42	14
84L050	4	84	253.92	254.69	—	75	19	42	14
96L050	4	96	290.30	291.06	—	75	19	42	14

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

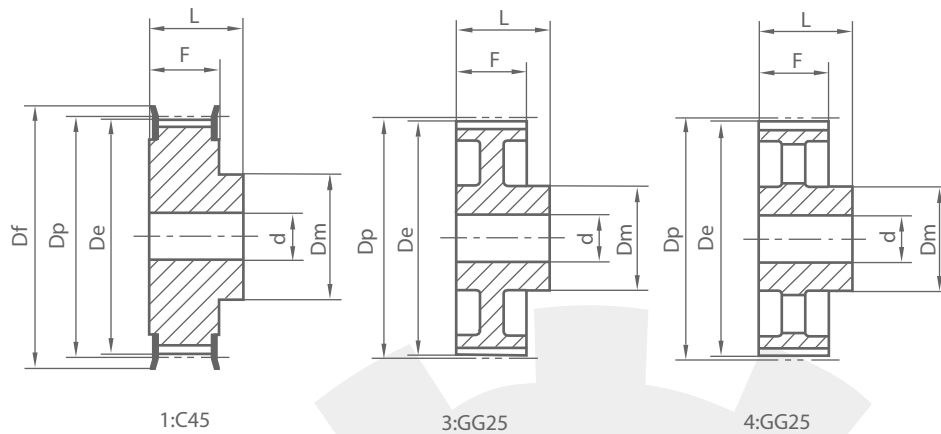


L075 PITCH 3/8" (9.525mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
10L075F	1	10	29.56	30.33	37	20	25.4	38	8
11L075F	1	11	32.59	33.35	37	24	25.4	38	8
12L075F	1	12	35.62	36.37	43	24	25.4	38	8
13L075F	1	13	38.65	39.41	43	28	25.4	38	8
14L075F	1	14	41.68	42.44	48	28	25.4	38	8
15L075F	1	15	44.72	45.48	51	34	25.4	38	8
16L075F	1	16	47.75	48.51	54	36	25.4	38	8
17L075F	1	17	50.78	51.54	57	36	25.4	38	10
18L075F	1	18	53.81	54.59	60	40	25.4	38	10
19L075F	1	19	56.84	57.61	63	40	25.4	38	10
20L075F	1	20	59.88	60.63	67	40	25.4	38	10
21L075F	1	21	62.91	63.68	70	45	25.4	38	10
22L075F	1	22	65.94	66.70	75	45	25.4	38	10
23L075F	1	23	68.97	69.73	79	55	25.4	38	10
24L075F	1	24	72.00	72.77	79	55	25.4	38	10
25L075F	1	25	75.04	75.80	83	58	25.4	38	10
26L075F	1	26	78.07	78.84	87	58	25.4	38	12
27L075F	1	27	81.10	81.86	91	58	25.4	38	12
28L075F	1	28	84.13	84.89	91	58	25.4	38	12
30L075F	1	30	90.20	90.96	97	70	25.4	38	12
32L075F	1	32	96.26	97.03	102	70	25.4	38	12
33L075F	1	33	99.29	100.05	112	70	25.4	38	12
34L075F	1	34	102.32	103.08	115	70	25.4	38	12
35L075F	1	35	105.35	106.12	115	70	25.4	38	12
36L075F	1	36	108.39	109.14	120	70	25.4	38	12
38L075F*	1	38	114.46	115.22	120	70	25.4	38	12
40L075F	1	40	120.51	121.29	128	70	25.4	38	12
42L075F	1	42	126.57	127.34	135	70	25.4	38	12
44L075F	1	44	132.64	133.40	142	70	25.4	38	12
45L075F	1	45	135.67	136.44	142	70	25.4	38	12
48L075F	1	48	144.77	145.54	150	70	25.4	38	12
50L075	3	50	150.83	151.60	—	70	25.4	38	14
52L075	3	52	156.90	157.66	—	70	25.4	38	14
56L075	3	56	169.02	169.79	—	70	25.4	38	14
57L075	3	57	172.06	172.82	—	70	25.4	38	14
60L075	3	60	181.15	181.92	—	75	25.4	45	14
70L075*	4	70	211.47	212.23	—	75	25.4	45	14
72L075	4	72	217.53	218.29	—	75	25.4	45	14
84L075	4	84	253.92	254.69	—	75	25.4	45	14
96L075	4	96	290.30	291.06	—	75	25.4	45	14

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

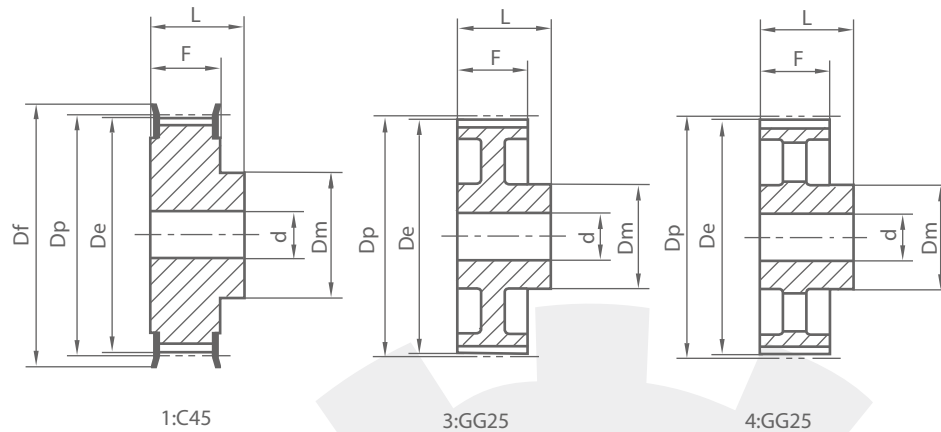


L100 PITCH 3/8" (9.525mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
10L100F	1	10	29.56	30.33	37	20	31.8	45	8
11L100F	1	11	32.59	33.35	37	24	31.8	45	8
12L100F	1	12	35.62	36.37	43	24	31.8	45	8
13L100F	1	13	38.65	39.41	43	28	31.8	45	8
14L100F	1	14	41.68	42.44	48	28	31.8	45	10
15L100F	1	15	44.72	45.48	51	34	31.8	45	10
16L100F	1	16	47.75	48.51	54	36	31.8	45	10
17L100F	1	17	50.78	51.54	57	36	31.8	45	10
18L100F	1	18	53.81	54.59	60	40	31.8	45	10
19L100F	1	19	56.84	57.61	63	40	31.8	45	10
20L100F	1	20	59.88	60.63	67	40	31.8	45	10
21L100F	1	21	62.91	63.68	70	45	31.8	45	10
22L100F	1	22	65.94	66.70	75	45	31.8	45	12
23L100F	1	23	68.97	69.73	79	55	31.8	45	12
24L100F	1	24	72.00	72.77	79	55	31.8	45	12
25L100F	1	25	75.04	75.80	83	58	31.8	45	12
26L100F	1	26	78.07	78.84	87	58	31.8	45	12
27L100F	1	27	81.10	81.86	91	58	31.8	45	12
28L100F	1	28	84.13	84.89	91	58	31.8	45	12
30L100F	1	30	90.20	90.96	97	70	31.8	45	12
32L100F	1	32	96.26	97.03	102	70	31.8	45	12
33L100F	1	33	99.29	100.05	112	70	31.8	45	12
34L100F	1	34	102.32	103.08	115	70	31.8	45	12
35L100F	1	35	105.35	106.12	115	70	31.8	45	12
36L100F	1	36	108.39	109.14	120	70	31.8	45	12
40L100F	1	40	120.50	121.29	128	70	31.8	45	12
42L100F	1	42	126.57	127.34	135	70	31.8	45	12
44L100F	1	44	132.64	133.40	142	70	31.8	45	12
45L100F	1	45	135.67	136.44	142	70	31.8	45	12
48L100F	1	48	144.77	145.54	150	70	31.8	45	12
50L100	3	50	150.83	151.60	—	70	31.8	45	14
52L100	3	52	156.90	157.66	—	70	31.8	45	14
56L100	3	56	169.02	169.79	—	70	31.8	45	14
57L100	3	57	172.06	172.82	—	70	31.8	45	14
60L100	3	60	181.15	181.92	—	75	31.8	45	14
68L100*	4	68	205.41	206.17	—	75	31.8	45	14
72L100	4	72	217.53	218.29	—	75	31.8	45	14
84L100	4	84	253.92	254.69	—	75	31.8	45	14
96L100	4	96	290.30	291.06	—	75	31.8	45	14

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

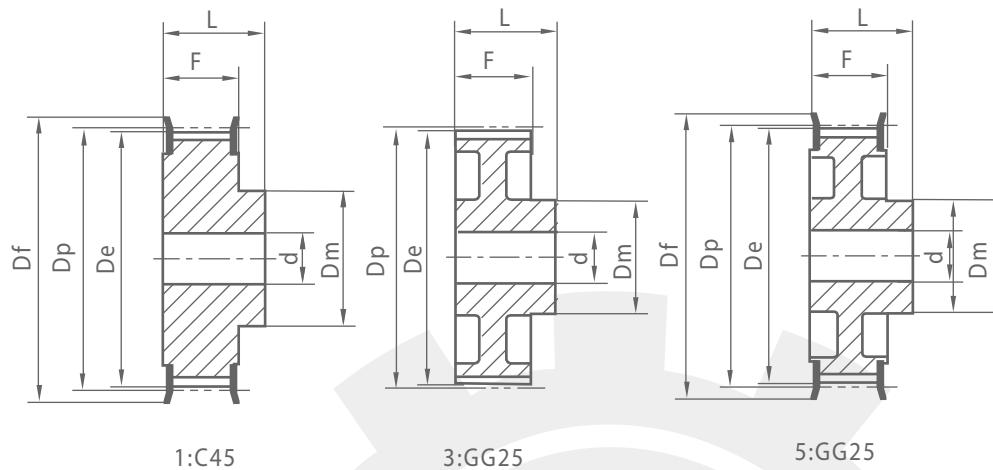


H075 PITCH 1/2" (12.70mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
14H075F	1	14	55.22	56.59	63	40	26.4	40	10
15H075F	1	15	59.27	60.64	70	45	26.4	40	10
16H075F	1	16	63.31	64.67	70	45	26.4	40	10
17H075F	1	17	67.35	68.72	75	45	26.4	40	12
18H075F	1	18	71.39	72.77	79	55	26.4	40	12
19H075F	1	19	75.44	76.81	83	60	26.4	40	12
20H075F	1	20	79.48	80.85	87	62	26.4	40	12
21H075F	1	21	83.52	84.89	91	65	26.4	40	12
22H075F	1	22	87.56	88.93	94	68	26.4	40	12
23H075F	1	23	91.61	92.98	102	72	26.4	40	12
24H075F	1	24	95.65	97.03	102	72	26.4	40	12
25H075F	1	25	99.69	101.06	112	72	26.4	40	12
26H075F	1	26	103.73	105.11	112	80	26.4	40	12
27H075F	1	27	107.78	109.15	120	80	26.4	40	12
28H075F	1	28	111.82	113.18	120	80	26.4	40	12
30H075F	1	30	119.90	121.29	128	80	26.4	40	14
32H075F	1	32	127.99	129.36	135	80	26.4	40	14
33H075F	1	33	132.03	133.40	142	80	26.4	40	14
34H075F	1	34	136.07	137.45	150	80	26.4	40	14
35H075F	1	35	140.12	141.49	150	80	26.4	40	14
36H075F	1	36	144.16	145.54	158	80	26.4	40	14
38H075F	1	38	152.24	153.62	158	80	26.4	40	14
40H075F	1	40	160.33	161.70	168	80	26.4	40	14
42H075F*	1	42	168.41	169.79	175	80	26.4	40	12
44H075F	5	44	176.50	177.88	184	80	26.4	40	14
48H075F	5	48	192.67	194.03	200	90	26.4	45	14
50H075	3	50	200.75	202.13		90	26.4	45	14

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

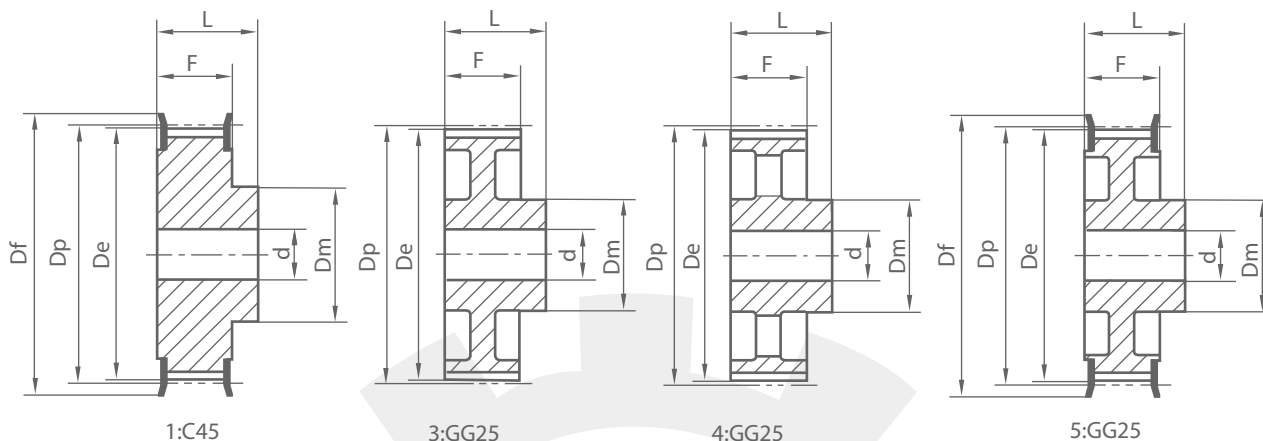


H100 PITCH 1/2" (12.70mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
14H100F	1	14	55.22	56.69	63	40	31.8	45	12
15H100F	1	15	59.27	60.64	70	45	31.8	45	12
16H100F	1	16	63.31	64.67	70	45	31.8	45	12
17H100F	1	17	67.35	68.72	75	45	31.8	45	12
18H100F	1	18	71.39	72.77	79	55	31.8	45	12
19H100F	1	19	75.44	76.81	83	60	31.8	45	14
20H100F	1	20	79.48	80.85	87	62	31.8	45	14
21H100F	1	21	83.52	84.89	91	65	31.8	45	14
22H100F	1	22	87.56	88.93	94	68	31.8	45	14
23H100F	1	23	91.61	92.98	102	72	31.8	45	14
24H100F	1	24	95.65	97.03	102	72	31.8	45	14
25H100F	1	25	99.69	101.06	112	72	31.8	45	14
26H100F	1	26	103.73	105.11	112	80	31.8	45	14
27H100F	1	27	107.78	109.15	120	80	31.8	45	14
28H100F	1	28	111.82	113.18	120	80	31.8	45	14
29H100F	1	29	115.86	117.23	120	80	31.8	45	14
30H100F	1	30	119.90	121.29	128	80	31.8	45	14
32H100F	1	32	127.99	129.36	135	80	31.8	45	14
33H100F	1	33	132.03	133.40	142	80	31.8	45	14
34H100F	1	34	136.07	137.45	150	80	31.8	45	14
35H100F	1	35	140.12	141.49	150	80	31.8	45	14
36H100F	1	36	144.16	145.54	158	80	31.8	45	14
38H100F	1	38	152.24	153.62	158	80	31.8	45	14
40H100F	1	40	160.33	161.70	168	80	31.8	45	14
42H100F*	1	42	168.41	169.79	175	80	31.8	45	14
44H100F	5	44	176.50	177.88	184	80	31.8	50	18
45H100F	5	45	180.54	181.91	192	80	31.8	50	18
48H100F	5	48	192.67	194.03	200	90	31.8	50	18
50H100	3	50	200.75	202.13	—	90	31.8	50	18
52H100	3	52	208.84	210.21	—	90	31.8	50	18
57H100*	4	57	229.05	230.42	—	90	31.8	50	18
58H100	4	58	233.09	234.47	—	90	31.8	50	18
60H100	4	60	241.18	242.55	—	100	31.8	50	18
68H100*	4	68	273.53	274.90	—	100	31.8	55	18
70H100	4	70	281.61	282.98	—	100	31.8	55	18
72H100	4	72	289.69	291.06	—	120	31.8	55	18
84H100	4	84	338.20	339.57	—	120	31.8	55	18
96H100	4	96	386.71	388.09	—	120	31.8	60	18
120H100	4	120	483.73	485.12	—	120	31.8	60	18
150H100*	4	150	605.01	606.38	—	120	31.8	60	18

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

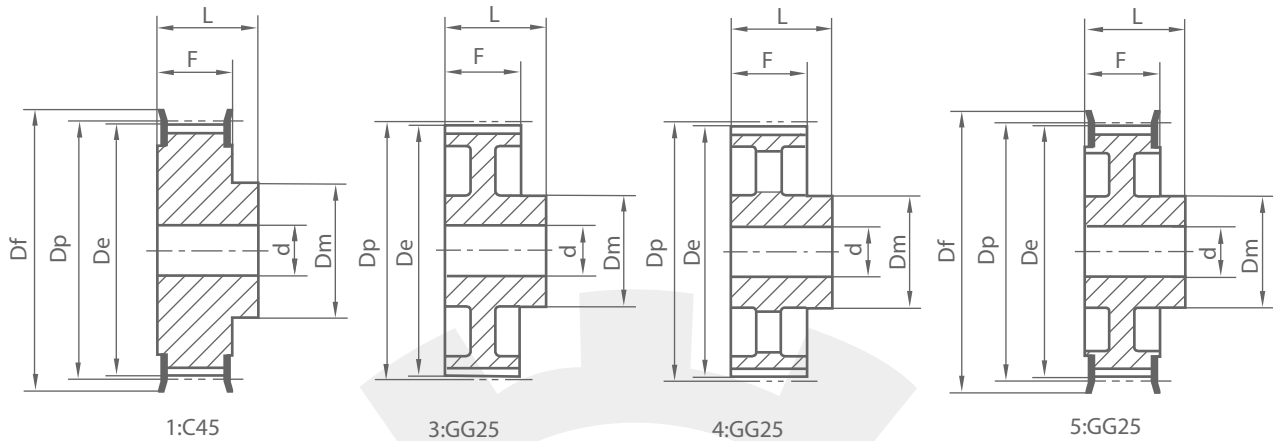


H150 PITCH 1/2" (12.70mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
14H150F	1	14	55.22	56.59	63	42	46.0	58	18
15H150F	1	15	59.27	60.64	70	45	46.0	58	18
16H160F	1	16	63.31	64.67	70	45	46.0	58	18
17H150F	1	17	67.35	68.72	75	45	46.0	58	18
18H150F	1	18	71.39	72.77	79	55	46.0	58	18
19H150F	1	19	75.44	76.81	83	60	46.0	58	18
20H150F	1	20	79.48	80.85	87	62	46.0	58	18
21H150F	1	21	83.52	84.89	91	65	46.0	58	18
22H150F	1	22	87.56	88.93	94	68	46.0	58	18
23H150F	1	23	91.61	92.98	102	72	46.0	58	18
24H150F	1	24	95.65	97.03	102	72	46.0	58	18
25H150F	1	25	99.69	101.06	112	72	46.0	58	18
26H150F	1	26	103.73	105.11	112	80	46.0	58	18
27H150F	1	27	107.78	109.15	120	80	46.0	58	18
28H150F	1	28	111.82	113.18	120	80	46.0	58	18
29H150F	1	29	115.86	117.23	120	80	46.0	58	18
30H150F	1	30	119.90	121.29	128	80	46.0	58	18
32H150F	1	32	127.99	129.36	135	80	46.0	58	18
33H150F	1	33	132.03	133.40	142	80	46.0	58	18
34H150F	1	34	136.07	137.45	150	80	46.0	58	18
35H150F	1	35	140.12	141.49	150	80	46.0	58	18
36H150F	1	36	144.16	145.54	158	80	46.0	58	18
38H150F	1	38	152.24	153.62	158	80	46.0	58	18
40H150F	1	40	160.33	161.70	168	80	46.0	58	18
42H150F	1	42	168.41	169.79	175	80	46.0	58	18
44H150	5	44	176.50	177.87	184	80	46.0	58	18
45H150F	5	45	180.54	181.91	192	80	46.0	58	18
48H150F	5	48	192.67	194.03	200	90	46.0	65	18
50H150	3	50	200.75	202.13	—	90	46.0	65	18
52H150	3	52	208.84	210.21	—	90	46.0	65	18
57H150*	4	57	229.05	230.43	—	90	46.0	65	18
58H150	4	58	233.09	234.47	—	90	46.0	65	18
60H150	4	60	241.18	242.55	—	100	46.0	65	18
68H150*	4	68	273.53	274.91	—	100	46.0	65	24
70H150	4	70	281.61	282.98	—	100	46.0	65	24
72H150	4	72	289.69	291.06	—	120	46.0	65	24
84H150	4	84	338.20	339.57	—	120	46.0	65	24
96H150	4	96	386.71	388.09	—	120	46.0	65	24
120H150	4	120	483.73	485.12	—	120	46.0	65	24
150H150*	4	150	605.01	606.38	—	120	46.0	65	24

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

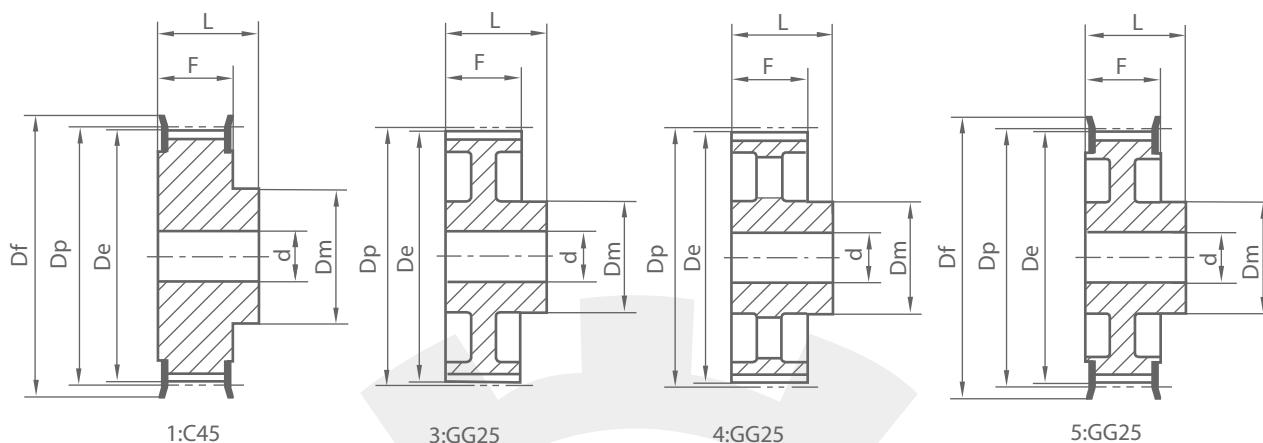


H200 PITCH 1/2" (12.70mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
14H200F	1	14	55.22	56.59	63	40	58.7	70	18
15H200F	1	15	59.27	60.64	70	45	58.7	70	18
16H200F	1	16	63.31	64.67	70	45	58.7	70	18
17H200F	1	17	67.35	68.72	75	45	58.7	70	18
18H200F	1	18	71.39	72.77	79	55	58.7	70	18
19H200F	1	19	75.44	76.81	83	60	58.7	70	18
20H200F	1	20	79.48	80.85	87	62	58.7	70	18
21H200F	1	21	83.52	84.89	91	65	58.7	70	18
22H200F	1	22	87.56	88.93	94	68	58.7	70	18
23H200F	1	23	91.61	92.98	102	72	58.7	70	18
24H200F	1	24	95.65	97.03	102	72	58.7	70	18
25H200F	1	25	99.69	101.06	112	72	58.7	70	18
26H200F	1	26	103.73	105.11	112	80	58.7	70	18
27H200F	1	27	107.78	109.15	120	80	58.7	70	18
28H200F	1	28	111.82	113.18	120	80	58.7	70	18
29H200F	1	29	115.86	117.23	120	80	58.7	70	18
30H200F	1	30	119.90	121.29	128	80	58.7	70	18
32H200F	1	32	127.99	129.36	135	80	58.7	70	18
33H200F	1	33	132.03	133.40	142	80	58.7	70	18
34H200F	1	34	136.07	137.45	150	80	58.7	70	18
35H200F	1	35	140.12	141.49	150	80	58.7	70	18
36H200F	1	36	144.16	145.54	158	80	58.7	70	18
38H200F	1	38	152.24	153.62	158	80	58.7	70	18
40H200F	1	40	160.33	161.70	168	80	58.7	70	18
42H200F*	1	42	168.41	169.79	175	80	58.7	70	18
44H200F	5	44	176.50	177.88	184	80	58.7	70	18
45H200F	5	45	180.54	181.91	192	80	58.7	70	18
48H200F	5	48	192.67	194.03	200	90	58.7	75	24
50H200	3	50	200.75	202.13	—	90	58.7	75	24
52H200	3	52	208.84	210.21	—	90	58.7	75	24
57H200*	4	57	229.05	230.42	—	90	58.7	75	24
58H200	4	58	233.09	234.47	—	90	58.7	75	24
60H200	4	60	241.18	242.55	—	100	58.7	75	24
68H200*	4	68	273.53	274.90	—	100	58.7	75	28
70H200	4	70	281.61	282.98	—	100	58.7	75	28
72H200	4	72	289.69	291.06	—	120	58.7	75	28
84H200	4	84	338.20	339.57	—	120	58.7	75	28
96H200	4	96	386.71	388.09	—	120	58.7	75	28
120H200	4	120	483.73	485.12	—	120	58.7	75	28
150H200*	4	150	605.01	606.38	—	120	58.7	75	28

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

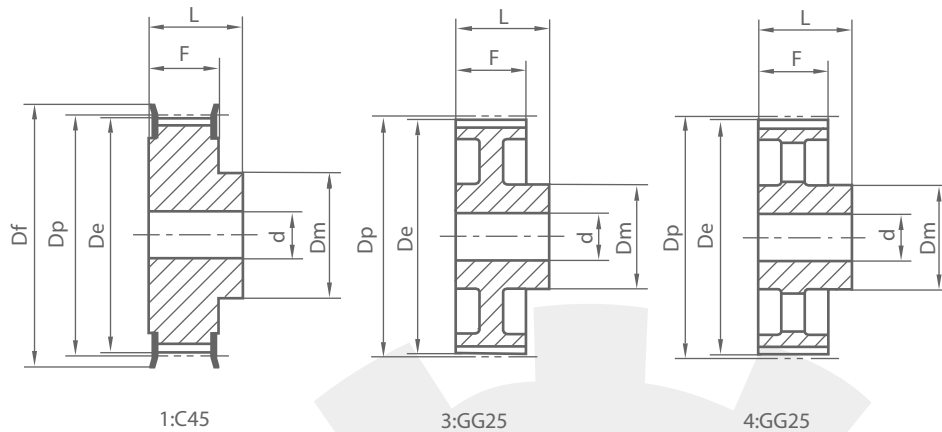


H300 PITCH 1/2" (12.70mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
14H300F	1	14	55.22	56.59	63	40	85.7	100	18
15H300F	1	15	59.27	60.64	70	45	85.7	100	18
16H300F	1	16	63.31	64.67	70	45	85.7	100	18
17H300F	1	17	67.35	68.72	75	45	85.7	100	18
18H300F	1	18	71.39	72.77	79	55	85.7	100	18
19H300F	1	19	75.44	76.81	83	60	85.7	100	18
20H300F	1	20	79.48	80.85	87	62	85.7	100	18
21H300F	1	21	83.52	84.89	91	65	85.7	100	18
22H300F	1	22	87.56	88.93	94	68	85.7	100	18
23H300F	1	23	91.61	92.98	102	72	85.7	100	18
24H300F	1	24	95.65	97.03	102	72	85.7	100	18
25H300F	1	25	99.69	101.06	112	72	85.7	100	18
26H300F	1	26	103.73	105.11	112	80	85.7	100	18
27H300F	1	27	107.78	109.15	120	80	85.7	100	18
28H300F	1	28	111.82	113.18	120	80	85.7	100	18
30H300F	1	30	119.90	121.29	128	80	85.7	100	18
32H300F	1	32	127.99	129.36	135	80	85.7	100	18
33H300F	1	33	132.03	133.40	142	80	85.7	100	18
34H300F	1	34	136.07	137.45	150	80	85.7	100	18
35H300F	1	35	140.12	141.49	150	80	85.7	100	18
36H300F	1	36	144.16	145.54	158	80	85.7	100	18
38H300F	1	38	152.24	153.62	158	80	85.7	100	18
40H300F	1	40	160.33	161.70	168	80	85.7	100	18
42H300F*	1	42	168.41	169.79	175	80	85.7	100	24
44H300	3	44	176.50	177.88	—	80	85.7	100	24
45H300*	3	45	180.54	181.91	—	90	85.7	100	24
48H300	3	48	192.67	194.03	—	90	85.7	100	24
50H300	3	50	200.75	202.13	—	90	85.7	100	24
52H300	3	52	208.84	210.21	—	90	85.7	100	24
57H300	4	57	229.09	230.47	—	90	85.7	100	24
58H300	4	58	233.09	234.47	—	90	85.7	100	24
60H300	4	60	241.18	242.55	—	100	85.7	100	24
70H300	4	70	281.61	282.98	—	120	85.7	100	30
72H300	4	72	289.69	291.06	—	120	85.7	100	28
84H300	4	84	338.20	339.57	—	120	85.7	100	28
96H300	4	96	386.71	388.09	—	120	85.7	100	28
120H300	4	120	483.73	485.12	—	120	85.7	100	28
150H300	4	150	605.01	606.38	—	120	85.7	100	30
156H300	4	156	629.26	630.64	—	120	85.7	100	30

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

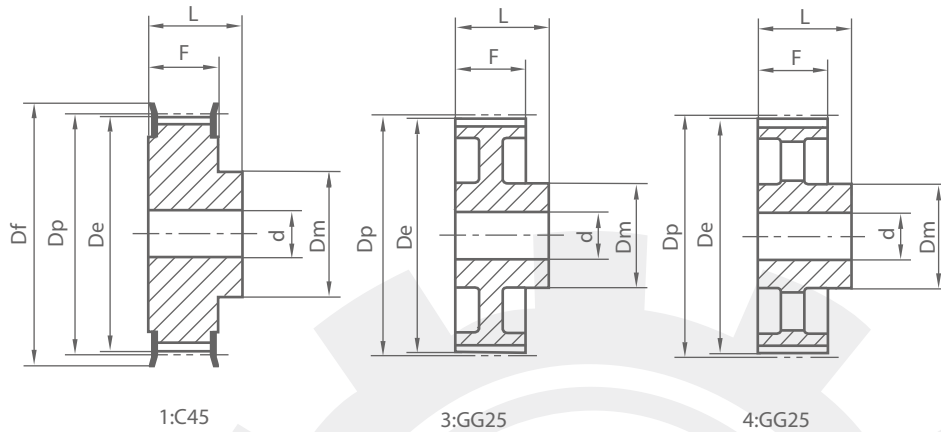


XH200 PITCH 7/8" (22.22mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XH200F	1	18	124.55	127.34	150	100	65	80	24
19XH200F	1	19	131.62	134.41	158	100	65	80	24
20XH200F	1	20	138.70	141.49	168	100	65	80	24
21XH200F	1	21	145.77	148.56	168	110	65	80	24
22XH200F	1	22	152.84	155.64	175	110	65	80	24
23XH200F*	1	23	159.91	162.70	175	120	65	80	24
24XH200F	1	24	166.99	169.79	192	120	65	80	24
25XH200F	1	25	174.07	176.86	200	120	65	80	24
26XH200F	1	26	181.14	183.93	205	120	65	80	24
27XH200F	1	27	188.22	191.01	205	120	65	80	24
28XH200F	1	28	195.29	198.09	211	120	65	80	24
30XH200F	1	30	209.44	212.23	226	120	65	80	24
32XH200F	1	32	223.59	226.38	240	120	65	80	24
34XH200F	1	34	237.74	240.53	256	120	65	80	24
38XH200*	3	38	266.03	268.83	—	150	65	80	28
40XH200*	3	40	280.18	282.98	—	150	65	100	28
46XH200*	4	46	322.63	325.42	—	150	65	100	28
48XH200*	4	48	336.78	339.57	—	150	65	100	28
57XH200*	4	57	400.45	403.24	—	150	65	100	28
58XH200*	4	58	407.52	410.32	—	150	65	100	28
60XH200*	4	60	421.67	424.47	—	150	65	100	28
70XH200*	4	70	492.42	495.21	—	150	65	100	28
72XH200*	4	72	506.56	509.36	—	160	65	100	30
78XH200*	4	78	549.01	551.81	—	160	65	100	30
80XH200*	4	80	563.16	565.95	—	160	65	100	30
82XH200*	4	82	577.31	580.10	—	160	65	100	30
84XH200*	4	84	591.46	594.25	—	160	65	100	30
94XH200*	4	94	662.20	665.00	—	160	65	100	30
96XH200*	4	96	676.35	679.15	—	160	65	100	30
118XH200*	4	118	831.99	834.78	—	160	65	100	30
120XH200*	4	120	846.14	848.93	—	160	65	100	30

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

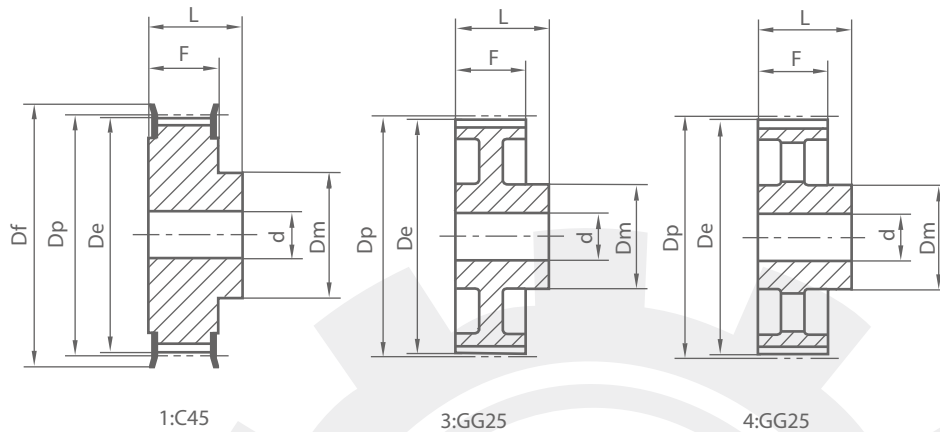


XH300 PITCH 7/8" (22.22mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XH300F	1	18	124.55	127.34	150	100	92	110	28
19XH300F	1	19	131.62	134.41	158	100	92	110	28
20XH300F	1	20	138.69	141.49	168	100	92	110	28
21XH300F	1	21	145.77	148.56	168	110	92	110	28
22XH300F	1	22	152.84	155.64	175	110	92	110	28
23XH300F*	1	23	159.91	162.70	175	120	92	110	28
24XH300F	1	24	166.99	169.79	192	120	92	110	28
25XH300F	1	25	174.07	176.86	200	120	92	110	28
26XH300F	1	26	181.14	183.93	205	120	92	110	28
27XH300F	1	27	188.22	191.01	205	120	92	110	28
28XH300F	1	28	195.29	198.09	211	150	92	110	28
30XH300F	1	30	209.44	212.23	226	150	92	110	28
32XH300F	1	32	223.59	226.38	240	150	92	110	28
34XH300F	1	34	237.74	240.53	256	150	92	110	28
38XH300*	3	38	266.03	268.83	—	150	92	120	30
40XH300*	3	40	280.18	282.98	—	150	92	120	30
46XH300*	4	46	322.63	325.42	—	175	92	120	30
48XH300*	4	48	336.78	339.57	—	175	92	120	30
58XH300*	4	58	407.52	410.32	—	175	92	120	30
60XH300*	4	60	421.67	424.47	—	175	92	120	30
70XH300*	4	70	492.42	495.21	—	175	92	120	30
72XH300*	4	72	506.56	509.36	—	175	92	120	30
78XH300*	4	78	549.01	551.81	—	175	92	120	30
80XH300*	4	80	563.16	565.95	—	175	92	120	30
82XH300*	4	82	577.31	580.10	—	175	92	120	30
84XH300*	4	84	591.46	594.25	—	175	92	120	30
94XH300*	4	94	662.20	665.00	—	175	92	120	30
96XH300*	4	96	676.35	679.15	—	175	92	120	30
118XH300*	4	118	831.99	834.78	—	175	92	120	30
120XH300*	4	120	846.14	848.93	—	175	92	120	30

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

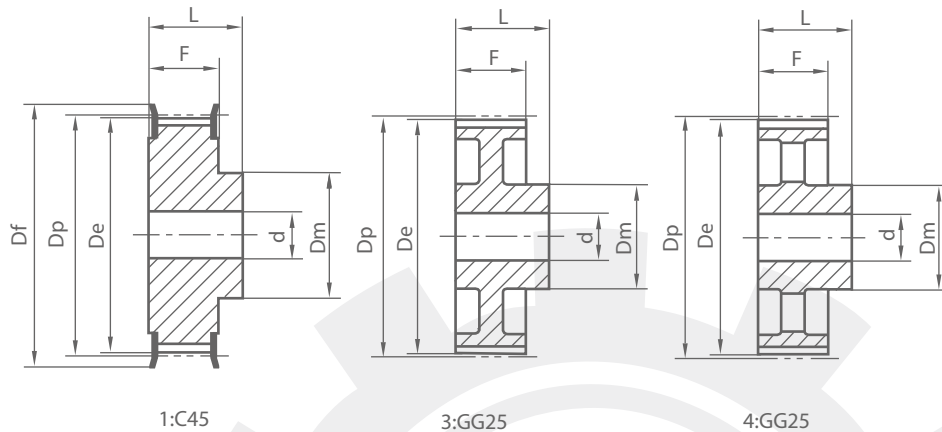


XH400 PITCH 7/8"(22.22mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XH400F	1	18	124.55	127.34	150	100	119	132	32
19XH400F	1	19	131.62	134.41	158	100	119	132	32
20XH400F	1	20	138.69	141.49	168	100	119	132	32
21XH400F	1	21	145.77	148.56	168	110	119	132	32
22XH400F	1	22	152.84	155.64	175	110	119	132	32
23XH400F*	1	23	159.92	162.72	175	120	119	132	32
24XH400F	1	24	166.99	169.79	192	120	119	132	32
25XH400F	1	25	174.07	176.86	200	120	119	132	32
26XH400F	1	26	181.14	183.93	205	120	119	132	32
27XH400F	1	27	188.22	191.01	205	120	119	132	32
28XH400F	1	28	195.29	198.09	211	150	119	132	32
30XH400F	1	30	209.44	212.23	226	150	119	132	32
32XH400F	1	32	223.59	226.38	240	150	119	132	32
34XH400F	1	34	237.74	240.53	256	150	119	132	32
38XH400*	3	38	266.03	268.83	—	150	116	132	30
40XH400*	3	40	280.18	282.98	—	150	116	132	30
46XH400*	4	46	322.63	325.42	—	175	116	132	30
48XH400*	4	48	336.78	339.57	—	175	116	132	30
58XH400*	4	58	407.52	410.32	—	175	116	132	30
60XH400*	4	60	421.67	424.47	—	175	116	132	30
70XH400*	4	70	492.42	495.21	—	175	116	132	30
72XH400*	4	72	506.56	509.36	—	175	116	132	30
78XH400*	4	78	549.01	551.81	—	175	116	132	30
80XH400*	4	80	563.16	565.95	—	175	116	132	30
82XH400*	4	82	577.31	580.10	—	175	116	132	30
84XH400*	4	84	591.46	594.25	—	175	116	132	30
94XH400*	4	94	662.20	665.00	—	175	116	132	30
96XH400*	4	96	676.35	679.15	—	175	116	132	30
118XH400*	4	118	831.99	834.78	—	175	116	132	30
120XH400*	4	120	846.14	848.93	—	175	116	132	30

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

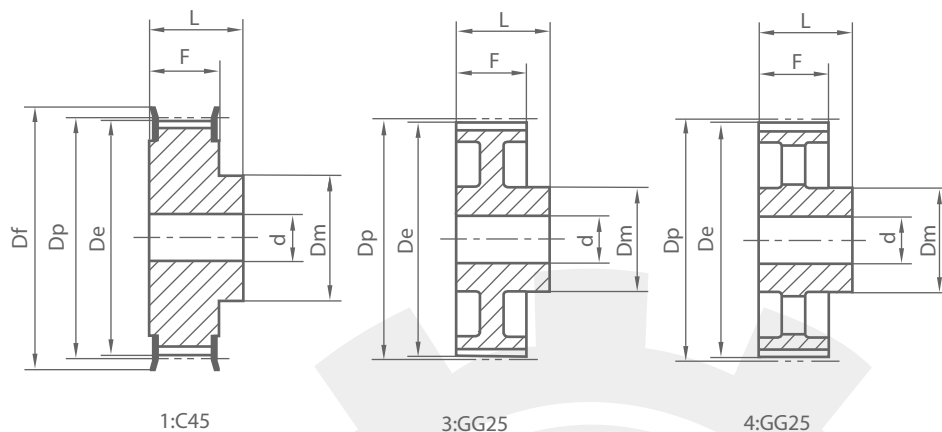

XXH200 PITCH 1 1/4" (31.75mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XXH200F	1	18	178.87	181.91	200	140	64.2	100	28
19XXH200F	1	19	188.97	192.02	205	140	64.2	100	28
20XXH200F	1	20	199.08	202.13	211	150	64.2	100	28
21XXH200F	1	21	209.19	212.23	226	150	64.2	100	28
22XXH200F	1	22	219.29	222.34	240	150	64.2	100	28
24XXH200	3	24	239.50	242.55	—	150	64.2	100	28
25XXH200	3	25	249.61	252.66	—	150	64.2	100	28
26XXH200	3	26	259.79	262.76	—	150	64.2	110	28
27XXH200	3	27	269.82	272.87	—	150	64.2	110	28
30XXH200	3	30	300.14	303.19	—	150	64.2	100	28
40XXH200	4	40	401.21	404.25	—	150	64.2	100	28
48XXH200	4	48	482.06	485.10	—	175	64.2	120	30
60XXH200	4	60	603.33	606.38	—	175	64.2	120	30
72XXH200	4	72	724.61	727.66	—	175	64.2	120	35
90XXH200	4	90	906.52	909.57	—	175	64.2	120	35


XXH300 PITCH 1 1/4" (31.75mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XXH300F	1	18	178.87	181.91	200	140	91.4	110	28
19XXH300F	1	19	188.97	192.02	205	150	91.4	110	28
20XXH300F	1	20	199.08	202.13	211	150	91.4	110	28
21XXH300F	1	21	209.19	212.13	226	150	91.4	110	28
22XXH300F	1	22	219.29	222.34	240	150	91.4	110	28
24XXH300	3	24	239.50	242.55	—	150	91.4	110	28
25XXH300	3	25	249.61	252.66	—	150	91.4	110	28
26XXH300	3	26	259.79	262.76	—	150	91.4	110	28
27XXH300	3	27	269.82	272.87	—	150	91.4	110	28
30XXH300	3	30	300.14	303.19	—	150	91.4	110	28
40XXH300	4	40	401.21	404.25	—	150	91.4	110	28
48XXH300	4	48	482.06	485.10	—	175	91.4	120	30
60XXH300	4	60	603.33	606.38	—	175	91.4	120	30
72XXH300	4	72	724.61	727.66	—	175	91.4	120	35
90XXH300	4	90	906.52	909.57	—	175	91.4	120	35

Timing pulley

ISO5294-1989

S_{tock}
B_{ore}

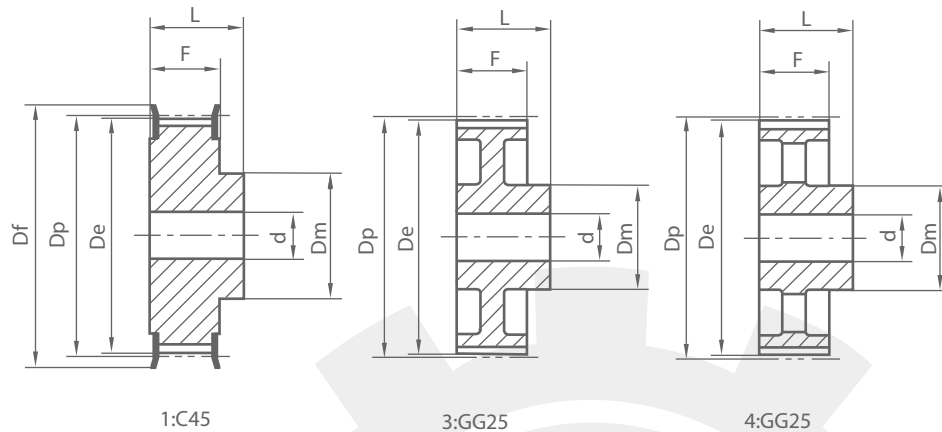


XXH400 PITCH 1 1/4" (31.75mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XXH400F	1	18	178.87	181.91	200	140	118	140	30
19XXH400F	1	19	188.97	192.02	205	150	118	140	30
20XXH400F	1	20	199.08	202.13	211	150	118	140	30
21XXH400F	1	21	209.19	212.23	226	150	118	140	30
22XXH400F	1	22	219.29	222.34	240	150	118	140	30
24XXH400	3	24	239.50	242.55	—	150	118	140	30
26XXH400	3	26	259.79	262.76	—	150	118	140	30
27XXH400	3	27	269.82	272.87	—	185	118	140	30
30XXH400	3	30	300.14	303.19	—	185	118	140	30
40XXH400	4	40	401.21	404.25	—	185	118	140	30
48XXH400	4	48	482.06	485.10	—	185	118	140	30
60XXH400	4	60	603.33	606.38	—	185	118	140	35
72XXH400	4	72	724.61	727.66	—	220	118	140	35
90XXH400	4	90	906.52	909.57	—	220	118	140	35

XXH500 PITCH 1 1/4" (31.75mm)

SPCFCTN	TYPE	Z	De	Dp	Df	Dm	F	L	d
18XXH500F	1	18	178.87	181.91	200	140	145.3	168	30
19XXH500F	1	19	188.97	192.02	205	150	145.3	168	30
20XXH500F	1	20	199.08	202.13	211	150	145.3	168	30
21XXH500F	1	21	209.19	212.23	226	150	145.3	168	30
22XXH500F	1	22	219.29	222.34	240	150	145.3	168	30
24XXH500	3	24	239.50	242.55	—	150	145.3	168	30
26XXH500	3	26	259.79	262.76	—	150	145.3	168	30
27XXH500	3	27	269.82	272.87	—	215	145.3	168	30
30XXH500	3	30	300.14	303.19	—	215	145.3	168	30
40XXH500	4	40	401.21	404.25	—	215	145.3	168	30
48XXH500	4	48	482.06	485.10	—	215	145.3	168	35
60XXH500	4	60	603.33	606.38	—	240	145.3	168	35
72XXH500	4	72	724.61	727.66	—	240	145.3	168	35
90XXH500	4	90	906.52	909.57	—	240	145.3	168	35

Standard toothed bars

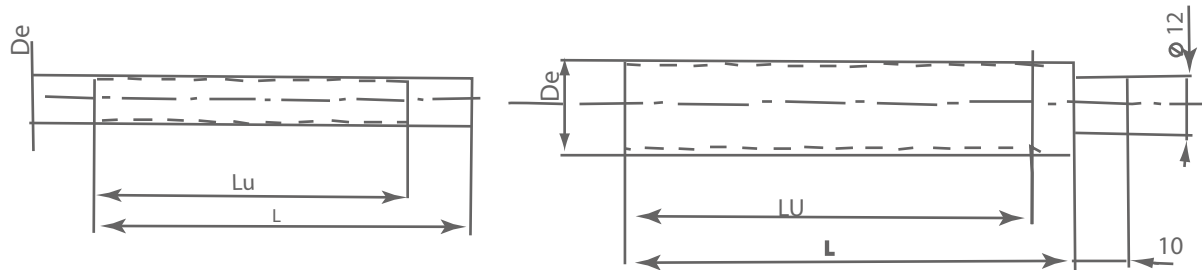

MXL-0.08"

		De	Lu	L
MXL10	10	5.97	50	75
MXL11	11	6.60	50	75
MXL12	12	7.26	50	75
MXL13	13	7.90	50	75
MXL14	14	8.56	50	75
MXL15	15	9.19	50	75
MXL16	16	9.83	50	75
MXL17	17	10.49	50	75
MXL18	18	11.12	50	75
MXL19	19	11.78	90	120
MXL20	20	12.42	90	120
MXL21	21	13.08	90	120
MXL22	22	13.72	125	140
MXL23	23	14.38	125	140
MXL24	24	15.01	125	140
MXL25	25	15.67	125	140
MXL26	26	16.31	125	140
MXL27	27	16.70	125	140
MXL28	28	16.94	125	140
MXL29	29	18.24	125	140
MXL30	30	18.90	125	140
MXL32	32	20.19	125	140
MXL34	34	21.49	125	140
MXL35	35	22.12	132	140
MXL36	36	22.78	132	140
MXL38	38	24.08	132	140
MXL40	40	25.37	132	140
MXL42	42	26.67	140	140
MXL44	44	27.94	140	140
MXL45	45	28.60	140	140
MXL48	48	30.53	140	140
MXL50	50	32.33	140	140
MXL60	60	38.30	160	160
MXL64	64	40.89	160	160
MXL65	65	41.53	160	160
MXL70	70	44.78	160	160
MXL72	72	46.05	160	160
MXL75	75	48.01	160	160
MXL90	90	57.71	160	160
MXL110	110	70.64	160	160

XL-1/5"

		De	Lu	L
XL 10	10	15.66	140	140
XL 11	11	17.28	140	140
XL 12	12	18.90	140	140
XL 13	13	20.51	140	140
XL 14	14	22.13	140	140
XL 15	15	23.75	140	140
XL 16	16	25.36	140	140
XL 17	17	26.98	140	140
XL 18	18	28.60	140	140
XL 19	19	30.22	140	140
XL 20	20	31.83	140	140
XL 21	21	33.45	160	160
XL 22	22	35.07	160	160
XL 23	23	36.60	160	160
XL 24	24	38.30	160	160
XL 25	25	39.93	160	160
XL 26	26	41.53	160	160
XL 27	27	43.15	160	160
XL 28	28	44.77	160	160
XL 29	29	46.39	160	160
XL 30	30	48.00	160	160
XL 32	32	51.24	160	160
XL 33	33	52.85	160	160
XL 34	34	54.47	160	160
XL 35	35	56.09	160	160
XL 36	36	57.70	160	160
XL 38	38	60.94	160	160
XL 39	39	62.56	160	160
XL 40	40	64.17	160	160
XL 41	41	65.79	160	160
XL 42	42	67.41	160	160
XL 43	43	69.02	160	160
XL 44	44	70.64	160	160
XL 48	48	77.11	160	160
XL 56	56	90.04	160	160
XL 60	60	96.51	160	160
XL 72	72	115.92	160	160

L-3/8"

		De	Lu	L
L 10	10	29.56	140	140
L 11	11	32.59	140	140
L 12	12	35.62	160	160
L 13	13	38.65	160	160
L 14	14	41.68	160	160
L 15	15	44.72	160	160
L 16	16	47.75	160	160
L 17	17	50.78	160	160
L 18	18	53.81	160	160
L 19	19	56.84	160	160
L 20	20	59.88	160	160
L 21	21	62.91	160	160
L 22	22	65.94	160	160
L 23	23	68.97	160	160
L 24	24	72.00	160	160
L 27	27	81.10	160	160
L 30	30	90.20	160	160

Special Note

We can also supply the flanges of the above timing belt pulleys separately. The customers can order flanges according to the corresponding pulleys part numbers