


## NSPT-LOCKS

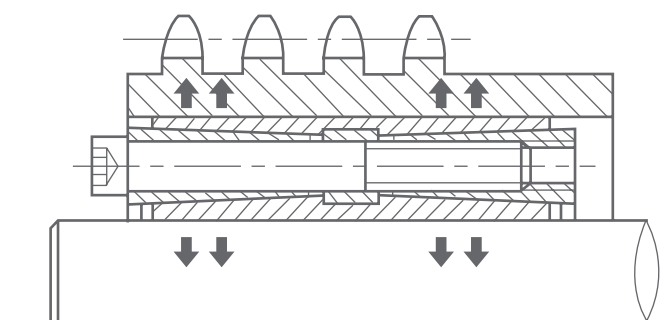

Suitable for Shaft Diameter


Metric:  $\phi 45 \sim \phi 340$  (mm)

Inch:  $1\frac{3}{4}'' \sim 13\frac{3}{8}''$

D NSPT-LOCKS is a heavier type than type B with a connecting capacity of 2 to 3 times over type B. It has the same dimensions as type B NSPT-LOCKS but is more economical than type B since it has more capacity.

The characteristics of D NSPT-LOCKS are the ease of self-installation and good concentricity. The guiding taper surface does not require special machining, and the central bore of the hub is in a straight line with the surface of the shaft. It reduces the production time and costs.

D NSPT-LOCKS have high installation precision and connecting capacity. The connecting function is provided by the friction and pressures between the lock, shaft and hub. There is no need for machining keys since it connects without slot or key. This type of NSPT-LOCKS is commonly used in transmission with heavy duty connections and/or large torques.

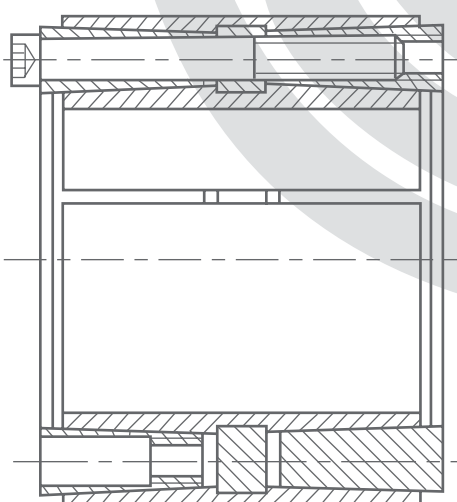

Expression of NSPT-LOCKS Type D

**NL 200 X 260 D**

NSPT Lock Type D

Outside Diameter D

Shaft Diameter d

NSPT-LOCKS Code

**D NSPT-LOCKS**

Conversion: 1 inch = 25.40mm


Conversion

1 ft-lbs. = 0.1382 kgf-m = 1.3550 N.m

1 Psi = 0.0007 kgf/mm<sup>2</sup> = 0.0069 Mpa

NSPT-LOCKS

Inches

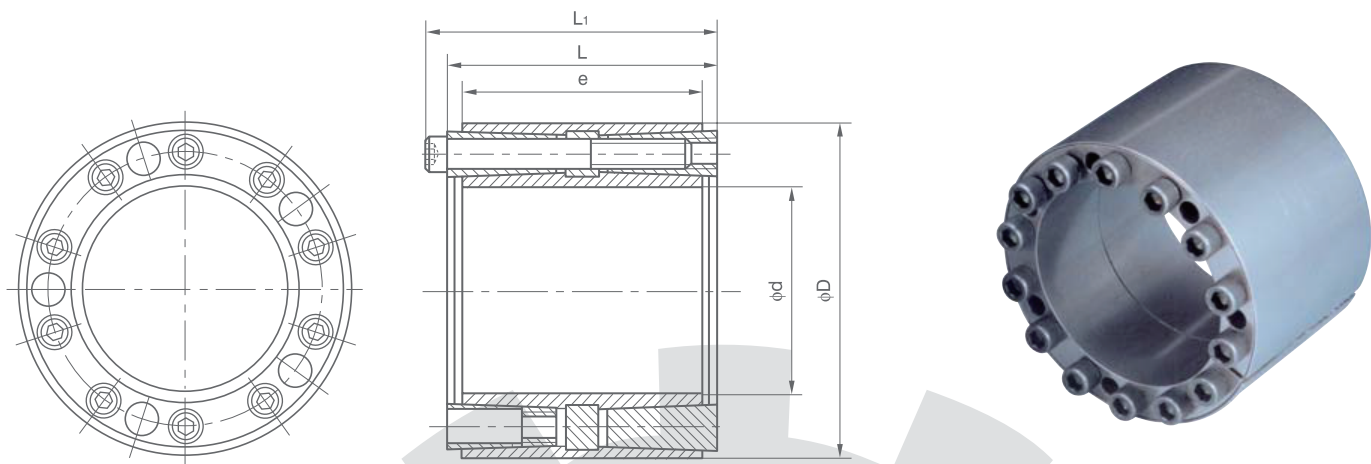


D NSPT-LOCKS

| NSPT Catalog | INCH SERIES INCHES |       |       | INCHES |       |       | Mt<br>ft-lb | Axial<br>force lb | pw<br>psi | pn<br>psi | LOCKING SCREW |             |
|--------------|--------------------|-------|-------|--------|-------|-------|-------------|-------------------|-----------|-----------|---------------|-------------|
|              | Size               | d     | D     | l      | L     | L1    |             |                   |           |           | No.x type     | Ms<br>ft-lb |
| NL1.00D      | 1                  | 1.000 | 2.165 | 1.535  | 1.772 | 2.008 | 826         | 20239             | 34965     | 16147     | 8xM6          | 13          |
| NL1.316D     | 13/16              | 1.188 | 2.165 | 1.535  | 1.772 | 2.008 | 981         | 20239             | 29444     | 16147     | 8xM6          | 13          |
| NL1.14D      | 1 1/4              | 1.250 | 2.362 | 1.535  | 1.772 | 2.008 | 1033        | 20239             | 27972     | 14802     | 8xM6          | 13          |
| NL1.38D      | 1 3/8              | 1.375 | 2.362 | 1.535  | 1.772 | 2.008 | 1137        | 20239             | 25429     | 14802     | 8xM6          | 13          |
| NL1.716D     | 1 7/16             | 1.438 | 2.559 | 1.535  | 1.772 | 2.008 | 1188        | 20239             | 24323     | 14802     | 8xM6          | 13          |
| NL1.12D      | 1 1/2              | 1.500 | 2.559 | 2.205  | 2.520 | 2.835 | 2290        | 37394             | 29994     | 15237     | 8xM8          | 30          |
| NL1.58D      | 1 5/8              | 1.625 | 2.953 | 2.205  | 2.520 | 2.835 | 2481        | 37394             | 27687     | 15237     | 8xM8          | 30          |
| NL1.34D      | 1 3/4              | 1.750 | 2.953 | 2.205  | 2.520 | 2.835 | 2672        | 37394             | 25709     | 15237     | 8xM8          | 30          |
| NL1.78D      | 1 7/8              | 1.875 | 3.150 | 2.205  | 2.520 | 2.835 | 2863        | 37394             | 23996     | 14285     | 8xM8          | 30          |
| NL1.516D     | 1 15/16            | 1.938 | 3.150 | 2.205  | 2.520 | 2.835 | 2959        | 37394             | 23221     | 14285     | 8xM8          | 30          |
| NL2.00D      | 2                  | 2.000 | 3.150 | 2.205  | 2.520 | 2.835 | 3054        | 37394             | 22496     | 14285     | 8xM8          | 30          |
| NL2.18D      | 2 1/8              | 2.125 | 3.346 | 2.205  | 2.520 | 2.835 | 3245        | 37394             | 21173     | 13445     | 8xM8          | 30          |
| NL2.316D     | 2 3/16             | 2.188 | 3.346 | 2.205  | 2.520 | 2.835 | 3340        | 37394             | 20568     | 13445     | 8xM8          | 30          |
| NL2.14D      | 2 1/4              | 2.250 | 3.543 | 2.205  | 2.520 | 2.835 | 4294        | 46743             | 24995     | 15872     | 10xM8         | 30          |
| NL2.38D      | 2 3/8              | 2.375 | 3.543 | 2.205  | 2.520 | 2.835 | 4533        | 46743             | 23680     | 15872     | 10xM8         | 30          |
| NL2.716      | 2 7/16             | 2.438 | 3.740 | 2.205  | 2.520 | 2.835 | 4652        | 46743             | 23073     | 15037     | 10xM8         | 30          |
| NL2.12D      | 2 1/2              | 2.500 | 3.740 | 2.205  | 2.520 | 2.835 | 4772        | 46743             | 22496     | 15037     | 10xM8         | 30          |
| NL2.916D     | 2 9/16             | 2.563 | 3.740 | 2.205  | 2.520 | 2.835 | 4891        | 46743             | 21947     | 15037     | 10xM8         | 30          |
| NL2.58D      | 2 5/8              | 2.652 | 4.331 | 2.756  | 3.071 | 3.465 | 7956        | 74219             | 27215     | 16496     | 10xM10        | 61          |
| NL2.1116D    | 2 11/16            | 2.688 | 4.331 | 2.756  | 3.071 | 3.465 | 8145        | 74219             | 26582     | 16496     | 10xM10        | 61          |
| NL2.34D      | 2 3/4              | 2.750 | 4.331 | 2.756  | 3.071 | 3.465 | 8334        | 74219             | 25978     | 16496     | 10xM10        | 61          |
| NL2.78D      | 2 7/8              | 2.875 | 4.331 | 2.756  | 3.071 | 3.465 | 8713        | 74219             | 24848     | 16496     | 10xM10        | 61          |
| NL2.1516D    | 2 15/16            | 2.938 | 4.224 | 2.756  | 3.071 | 3.465 | 10683       | 89063             | 29183     | 18145     | 12xM10        | 61          |
| NL3.00D      | 3                  | 3.000 | 4.724 | 2.756  | 3.071 | 3.465 | 10910       | 89063             | 28575     | 18145     | 12xM10        | 61          |
| NL3.18D      | 3 1/8              | 3.125 | 4.724 | 2.756  | 3.071 | 3.465 | 11365       | 89063             | 27432     | 18145     | 12xM10        | 61          |
| NL3.14D      | 3 1/4              | 3.250 | 4.724 | 2.756  | 3.071 | 3.465 | 11820       | 89063             | 26377     | 18145     | 12xM10        | 61          |
| NL3.38D      | 3 3/8              | 3.375 | 5.118 | 2.756  | 3.071 | 3.465 | 12274       | 89063             | 25400     | 16750     | 12xM10        | 61          |
| NL3.716D     | 3 7/16             | 3.438 | 5.118 | 2.756  | 3.071 | 3.465 | 12501       | 89063             | 24938     | 16750     | 12xM10        | 61          |
| NL3.12D      | 3 1/2              | 3.500 | 5.118 | 2.756  | 3.071 | 3.465 | 12728       | 89063             | 24493     | 16750     | 12xM10        | 61          |
| NL3.58D      | 3 5/8              | 3.625 | 5.118 | 2.756  | 3.071 | 3.465 | 13183       | 89063             | 23649     | 16750     | 12xM10        | 61          |
| NL3.34D      | 3 3/4              | 3.750 | 5.709 | 3.543  | 3.937 | 4.409 | 19857       | 129674            | 25888     | 17006     | 12xM12        | 107         |
| NL3.78D      | 3 7/8              | 3.875 | 5.709 | 3.543  | 3.937 | 4.409 | 20518       | 129674            | 25053     | 17006     | 12xM12        | 107         |
| NL3.1516D    | 3 15/16            | 3.938 | 5.709 | 3.543  | 3.937 | 4.409 | 20850       | 129674            | 24655     | 17006     | 12xM12        | 107         |
| NL4.00D      | 4                  | 4.000 | 5.709 | 3.543  | 3.937 | 4.409 | 21180       | 129674            | 24270     | 17003     | 12xM12        | 107         |

\* For unlisted diameters please contact us

# NSPT-LOCKS

**Inches**

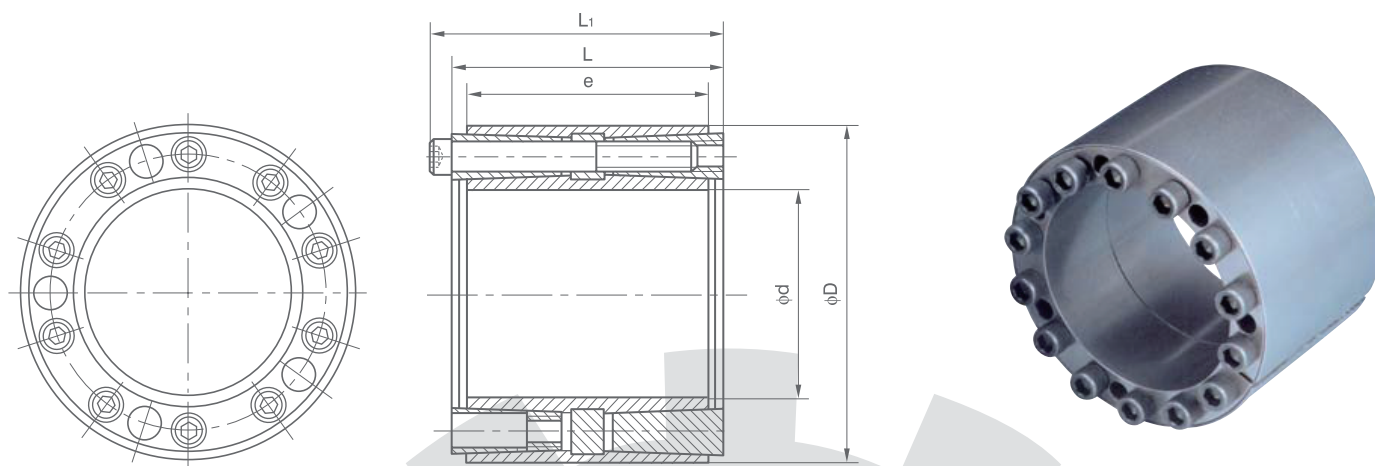

## D NSPT-LOCKS

| METRIC SIZES INCHES |        |        | INCHES |       |       | Mt<br>ft-lb | Axial<br>force lb | pw<br>psi | pn<br>psi | LOCKING SCREW |             |
|---------------------|--------|--------|--------|-------|-------|-------------|-------------------|-----------|-----------|---------------|-------------|
| Size                | d      | D      | e      | L     | L1    |             |                   |           |           | No.x type     | Ms<br>ft-lb |
| 45x75               | 1.772  | 2.953  | 2.205  | 2.520 | 2.835 | 2560        | 34875             | 23925     | 14500     | 8xM8          | 30          |
| 48x80               | 1.890  | 3.150  | 2.205  | 2.520 | 2.835 | 2723        | 34875             | 21750     | 13775     | 8xM8          | 30          |
| 50x80               | 1.969  | 3.150  | 2.205  | 2.520 | 2.835 | 2827        | 34875             | 21315     | 13775     | 8xM8          | 30          |
| 55x80               | 2.165  | 3.346  | 2.205  | 2.520 | 2.835 | 3152        | 34875             | 19575     | 12325     | 8xM8          | 30          |
| 60x90               | 2.362  | 3.543  | 2.205  | 2.520 | 2.835 | 4307        | 42750             | 22475     | 14500     | 10xM8         | 30          |
| 65x95               | 2.559  | 3.740  | 2.205  | 2.520 | 2.835 | 4640        | 42750             | 20300     | 13775     | 10xM8         | 30          |
| 70x110              | 2.756  | 4.331  | 2.756  | 3.071 | 3.465 | 7940        | 68625             | 24650     | 15225     | 10xM10        | 61          |
| 75x115              | 2.953  | 4.528  | 2.756  | 3.071 | 3.465 | 8540        | 68625             | 22475     | 14500     | 10xM10        | 61          |
| 80x120              | 3.150  | 4.724  | 2.756  | 3.071 | 3.465 | 10878       | 83025             | 25375     | 16675     | 12xM10        | 61          |
| 85x125              | 3.346  | 4.921  | 2.756  | 3.071 | 3.465 | 11618       | 83025             | 23925     | 15950     | 12xM10        | 61          |
| 90x130              | 3.543  | 5.118  | 2.756  | 3.071 | 3.465 | 12291       | 83250             | 22765     | 15370     | 12xM10        | 61          |
| 95x135              | 3.740  | 5.315  | 2.756  | 3.071 | 3.465 | 12972       | 83250             | 21750     | 14790     | 12xM10        | 61          |
| 100x145             | 3.937  | 5.709  | 3.543  | 3.937 | 4.409 | 19906       | 121050            | 23200     | 15950     | 12xM12        | 107         |
| 110x155             | 4.331  | 6.102  | 3.543  | 3.937 | 4.409 | 21852       | 121050            | 20735     | 14790     | 12xM12        | 107         |
| 120x165             | 4.724  | 6.496  | 3.543  | 3.937 | 4.409 | 27831       | 141300            | 22330     | 16240     | 14xM12        | 107         |
| 130x180             | 5.118  | 7.087  | 4.094  | 4.567 | 5.118 | 35520       | 166050            | 20735     | 15370     | 12xM14        | 170         |
| 140x190             | 5.512  | 7.480  | 4.094  | 4.567 | 5.118 | 44615       | 193725            | 23200     | 16965     | 14xM14        | 170         |
| 150x200             | 5.906  | 7.874  | 4.094  | 4.567 | 5.118 | 54612       | 221625            | 23925     | 18125     | 16xM14        | 170         |
| 160x210             | 6.299  | 8.268  | 4.094  | 4.567 | 5.118 | 58290       | 221175            | 22475     | 17110     | 16xM14        | 170         |
| 170x225             | 6.693  | 8.858  | 5.276  | 5.748 | 6.378 | 75280       | 269325            | 20300     | 15660     | 14xM16        | 263         |
| 180x235             | 7.087  | 9.252  | 5.276  | 5.748 | 6.378 | 91168       | 308025            | 21750     | 16675     | 16xM16        | 263         |
| 190x250             | 7.480  | 9.843  | 5.276  | 5.748 | 6.378 | 96111       | 307800            | 20445     | 15950     | 16xM16        | 263         |
| 200x260             | 7.874  | 10.236 | 5.276  | 5.748 | 6.378 | 101261      | 307800            | 19865     | 15080     | 16xM16        | 263         |
| 220x285             | 8.661  | 11.220 | 5.276  | 5.748 | 6.378 | 139120      | 385750            | 22475     | 17400     | 20xM16        | 263         |
| 240x305             | 9.449  | 12.008 | 5.276  | 5.748 | 6.378 | 166500      | 423000            | 22475     | 17400     | 20xM16        | 263         |
| 260x325             | 10.236 | 12.798 | 5.276  | 5.748 | 6.378 | 180560      | 423000            | 22475     | 16675     | 22xM16        | 263         |
| 280x355             | 11.024 | 13.976 | 6.496  | 6.968 | 7.756 | 276020      | 600750            | 21025     | 17400     | 20xM20        | 511         |
| 300x375             | 11.811 | 14.764 | 6.496  | 6.968 | 7.756 | 325600      | 659250            | 22475     | 18125     | 22xM20        | 511         |
| 320x405             | 12.598 | 15.945 | 6.496  | 6.968 | 7.756 | 347800      | 659250            | 21025     | 16675     | 22xM20        | 511         |
| 340x425             | 13.386 | 16.732 | 6.496  | 6.968 | 7.756 | 402560      | 720000            | 21750     | 17400     | 24xM20        | 511         |
| 360x455             | 14.173 | 17.913 | 6.496  | 6.968 | 7.756 | 486920      | 821250            | 20300     | 15950     | 22xM22        | 688         |
| 380x475             | 14.961 | 18.701 | 7.480  | 7.953 | 8.819 | 607540      | 972000            | 23200     | 18850     | 26xM22        | 688         |
| 400x495             | 15.748 | 19.488 | 7.480  | 7.953 | 8.819 | 639360      | 972000            | 21750     | 17400     | 26xM22        | 688         |

\* For unlisted diameters please contact us





## NSPT-LOCKS

**Metric**

**Conversion**

1 ft-lbs. = 0.1382 kgf-m = 1.3550 N.m

1 Psi = 0.0007 kgf/mm<sup>2</sup> = 0.0069 Mpa

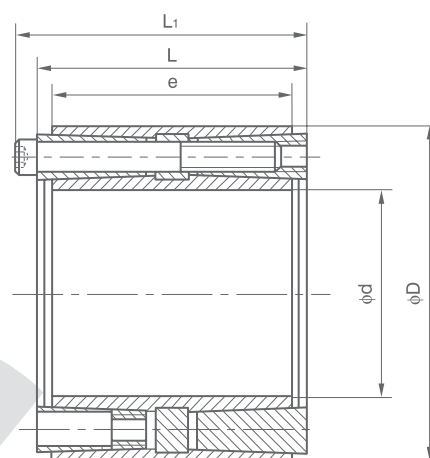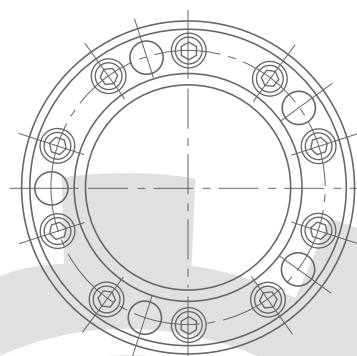

## D NSPT-LOCKS

| Catalog<br>dxD | Fundamental Dimensions |     |     | Internal Hexagon Headed Bolt |     | Rated Load |            | Pf  | MA   | G    |
|----------------|------------------------|-----|-----|------------------------------|-----|------------|------------|-----|------|------|
|                | e                      | L   | L1  | SIZES                        | QTY | Ft<br>KN   | Mt<br>KN.M | Mpa | N.M  | kg   |
| CL45x75D       | 56                     | 64  | 72  | M8x50                        | 9   | 170        | 3.90       | 179 | 40.2 | 1.25 |
| CL48x80D       | 56                     | 64  | 72  | M8x50                        | 9   | 170        | 4.15       | 168 | 40.2 | 1.41 |
| CL50x80D       | 56                     | 64  | 72  | M8x50                        | 9   | 170        | 4.30       | 162 | 40.2 | 1.35 |
| CL55x85D       | 56                     | 64  | 72  | M8x50                        | 9   | 170        | 4.70       | 147 | 40.2 | 1.45 |
| CL60x90D       | 56                     | 64  | 72  | M8x50                        | 11  | 208        | 6.30       | 165 | 40.2 | 1.55 |
| CL65x95D       | 56                     | 64  | 72  | M8x50                        | 11  | 208        | 6.90       | 130 | 40.2 | 1.92 |
| CL70x110D      | 70                     | 78  | 88  | M10x70                       | 11  | 330        | 11.80      | 179 | 81.3 | 3.11 |
| CL75x115D      | 70                     | 78  | 88  | M10x70                       | 11  | 330        | 12.60      | 167 | 81.3 | 3.28 |
| CL80x120D      | 70                     | 78  | 88  | M10x70                       | 12  | 360        | 14.70      | 171 | 81.3 | 3.45 |
| CL85x125D      | 70                     | 78  | 88  | M10x70                       | 12  | 360        | 15.60      | 161 | 81.3 | 3.63 |
| CL90x130D      | 70                     | 78  | 88  | M10x70                       | 13  | 390        | 17.90      | 165 | 81.3 | 3.80 |
| CL95x135D      | 70                     | 78  | 88  | M10x70                       | 13  | 390        | 18.90      | 156 | 81.3 | 3.97 |
| CL100x145D     | 90                     | 100 | 112 | M12x90                       | 12  | 467        | 23.30      | 181 | 145  | 6.8  |
| CL110x155D     | 90                     | 100 | 112 | M12x90                       | 13  | 553        | 30.40      | 190 | 145  | 7.5  |
| CL120x165D     | 90                     | 100 | 112 | M12x90                       | 15  | 617        | 37.0       | 195 | 145  | 8.6  |
| CL130x180D     | 104                    | 116 | 130 | M14x90                       | 13  | 759        | 49.0       | 180 | 230  | 11.1 |
| CL140x190D     | 104                    | 116 | 130 | M14x90                       | 15  | 843        | 59.0       | 186 | 230  | 11.8 |
| CL150x200D     | 104                    | 116 | 130 | M14x90                       | 16  | 897        | 67.0       | 185 | 230  | 12.6 |
| CL160x210D     | 104                    | 116 | 130 | M14x90                       | 17  | 950        | 76.0       | 183 | 230  | 13.4 |
| CL170x225D     | 134                    | 146 | 162 | M16x120                      | 15  | 1223       | 104.0      | 172 | 355  | 19.6 |
| CL180x235D     | 134                    | 146 | 162 | M16x120                      | 16  | 1289       | 116.0      | 172 | 355  | 20.6 |
| CL190x250D     | 134                    | 146 | 162 | M16x120                      | 17  | 1363       | 130.0      | 172 | 355  | 23.8 |
| CL200x260D     | 134                    | 146 | 162 | M16x120                      | 17  | 1438       | 143.7      | 172 | 355  | 24.9 |
| CL220x285D     | 134                    | 146 | 162 | M16x120                      | 20  | 1582       | 174        | 172 | 355  | 29.6 |
| CL240x305D     | 134                    | 146 | 162 | M16x120                      | 22  | 1725       | 207        | 172 | 355  | 31.9 |
| CL260x325D     | 134                    | 146 | 162 | M16x120                      | 22  | 1846       | 240        | 170 | 355  | 34.3 |
| CL280x355D     | 165                    | 177 | 197 | M20x150                      | 20  | 2429       | 340        | 168 | 690  | 52.0 |
| CL300x375D     | 165                    | 177 | 197 | M20x150                      | 22  | 2540       | 381        | 161 | 690  | 55.3 |
| CL320x405D     | 165                    | 177 | 197 | M20x150                      | 22  | 2881       | 461        | 175 | 690  | 67.3 |
| CL340x425D     | 165                    | 177 | 197 | M20x150                      | 24  | 2994       | 509        | 171 | 690  | 71.0 |



# NSPT-LOCKS

**Metric**

Conversion: 1 inch = 25.40mm

**Conversion**

1 ft-lbs. = 0.1382 kgf-m = 1.3550 N.m




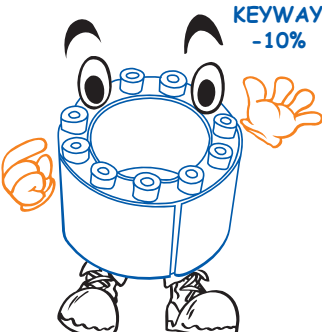
1 Psi = 0.0007 kgf/mm<sup>2</sup> = 0.0069 Mpa

## D NSPT-LOCKS

| Catalog<br>dxD | Fundamental Dimensions |     |     | Internal Hexagon Headed Bolt |     | Rated Load |            | Pf  | MA   | G    |
|----------------|------------------------|-----|-----|------------------------------|-----|------------|------------|-----|------|------|
|                | e                      | L   | L1  | SIZES                        | QTY | Ft<br>KN   | Mt<br>KN.M | Mpa | N.M  | kg   |
| CL360x455D     | 190                    | 202 | 224 | M22x150                      | 22  | 3589       | 646        | 169 | 930  | 96.5 |
| CL380x475D     | 190                    | 202 | 224 | M22x150                      | 26  | 3821       | 726        | 170 | 930  | 101  |
| CL400x495D     | 190                    | 202 | 224 | M22x150                      | 26  | 3960       | 792        | 168 | 930  | 106  |
| CL420x575D     | 190                    | 202 | 224 | M22x150                      | 26  | 4100       | 861        | 165 | 930  | 107  |
| CL440x535D     | 190                    | 202 | 224 | M22x150                      | 26  | 4260       | 930        | 165 | 937  | 109  |
| CL460x555D     | 190                    | 202 | 224 | M22x150                      | 26  | 4260       | 930        | 158 | 980  | 113  |
| CL480x575D     | 190                    | 202 | 224 | M22x150                      | 30  | 5000       | 930        | 176 | 1200 | 118  |
| CL500x595D     | 190                    | 202 | 224 | M22x150                      | 30  | 5000       | 930        | 169 | 1240 | 122  |
| CL520x615D     | 190                    | 202 | 224 | M22x150                      | 32  | 5330       | 930        | 174 | 1390 | 126  |
| CL540x635D     | 190                    | 202 | 224 | M22x150                      | 32  | 5330       | 930        | 168 | 1440 | 131  |
| CL560x655D     | 190                    | 202 | 224 | M22x150                      | 34  | 5680       | 930        | 172 | 1590 | 135  |
| CL580x675D     | 190                    | 202 | 224 | M22x150                      | 34  | 5860       | 930        | 172 | 1705 | 140  |
| CL600x695D     | 190                    | 202 | 224 | M22x150                      | 34  | 5860       | 930        | 166 | 1760 | 144  |

The items < CL200X260D are standard in stock products, the items > CL200X265D will be produced against orders

## Attention When Using NSPT-LOCKS
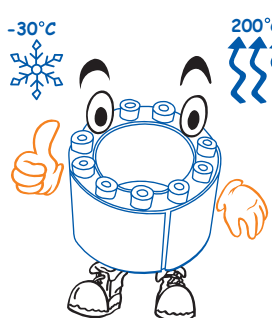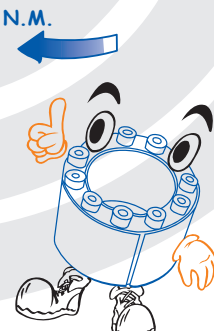
|  |  |
|--|--|
|  <p>1. Temperature for the working surroundings of NSPT-LOCKS is from -30°C to +200°C. Otherwise, the NSPT Locks can not work well.</p> |  <p>3. NSPT-LOCKS can be used and disassembled repeatedly. But after each repeated installation and disassembling, the shape of NSPT-LOCKS will change slightly. Torque will be reduced slightly as well.</p> |
| <p>2. When the NSPT-LOCKS are used in an open area or in a place containing moisture, it should be protected from rust.</p>             |  <p>4. If the NSPT-LOCKS is installed onto the shaft with keyway, the rated torque will be reduced by about 10%.</p>  |

## Key Elements for Design and Calculation of D/DS NSPT-LOCKS

### 1. Determine max torque and max axial load

$$M_{\max} = \frac{30000 H}{\pi \cdot n} \cdot K (\text{N m})$$

$$F_{\max} = F \cdot K$$

H--Transmission power KW

n--Rotational speed r/min

F--nominal axial force N

K--coefficient needed

Used coefficient sheet for K

|   |           |
|---|-----------|
| No shock load, transmitting with little inertia     | 1.5 – 2.5 |
| Slight shock load, transmitting with middle inertia | 2.0 – 4.0 |
| Big shock load, transmitting with heavy inertia     | 3.0 – 5.0 |

### 2. Calculate synthetic load and transmitted torque

$$M_h = \sqrt{M_{\max}^2 + \left(\frac{d}{2} \cdot F_{\max}\right)^2}$$

M<sub>max</sub>--Required transmitted torque Nm

F<sub>max</sub>--Required transmitted axial force N

M<sub>h</sub>--synthetic transmitted torque Nm

d--Transmission shaft diameter mm

M<sub>t</sub>--NSPT LOCK rated transmitted torque Nm

M<sub>t</sub> ≥ M<sub>h</sub> can be used

M<sub>t</sub> < M<sub>h</sub> need bigger type of NSPT lock or to be install by two NSPT locks or more together

### 3. Calculation for the hub diameter

$$D_a \geq D \sqrt{\frac{O_b + K_a \cdot P_h}{O_b - K_a \cdot P_h}}$$

D<sub>a</sub>--outside diameter of hub mm


D--inside diameter of hub mm

P<sub>h</sub>--surface pressures on hub Mpa

O<sub>b</sub>--tensile strength of material

K<sub>a</sub>--It should be 0.6 for single NSPT lock, it will be 0.8 when two NSPT locks or more are installed together

### 4. Calculation for the inside diameter of cannon

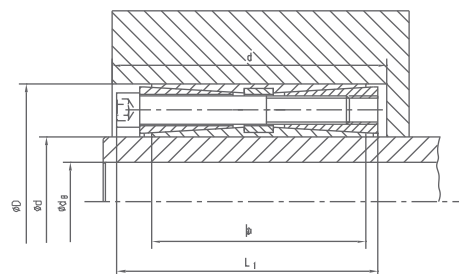

$$d_B \leq d \sqrt{\frac{O_b - 2 \cdot P_s \cdot K_3}{O_b}}$$

d<sub>B</sub>--inside diameter of cannon mm

d--outside diameter of cannon mm




6<sub>b</sub>--tensile strength of shaft material Mpa

P<sub>s</sub>--pressure on the surface of shaft Mpa

K<sub>3</sub>--coefficient=0.6

### 5. Settlement for the surface roughness and dimension tolerance

Clean the NSPT-LOCKS and install it into corresponding position of hub and shaft (Ref Drawing A). Tighten the bolts according to the order in Drawing B bolts. The bolts should be tightened 3 to 4 times up to specified rated torque. After correct installation, NSPT-LOCKS should be inspected radially and axially for runouts as per ① ≤ 0.05mm, ② ≤ 0.002Rmm in C.

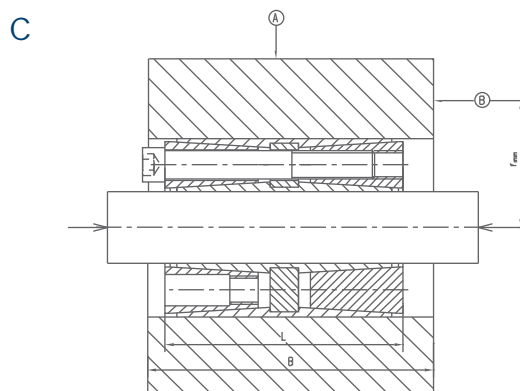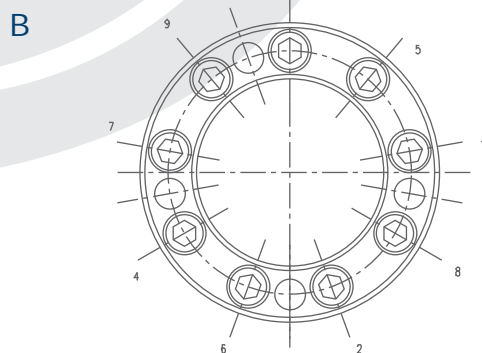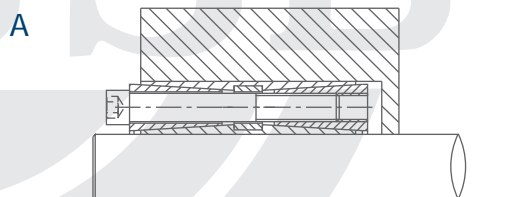




## New Standard Power Transmission


### 6. Determine the surface roughness and dimension tolerance

| Fitting section  | surface roughness | Dimension precision |
|------------------|-------------------|---------------------|
| shaft diameter d | 1.6/              | h8                  |
| bore diameter D  | 1.6/              | H8                  |

### 7. Disassembling for NSPT locks

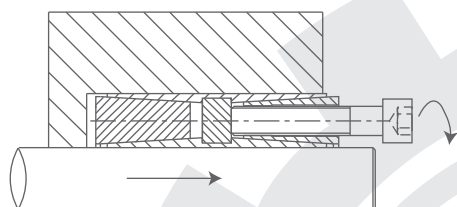

1. Loosen and remove all the tightening bolts. Then place the unloading bolts in the corresponding unloading tap hole of the tightening taper ring in one side, tighten and press in proper order. Separate the tightening taper ring from the inside and outside taper bushes.

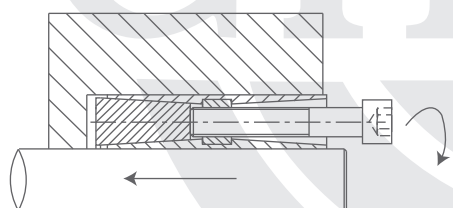


2. After removing the tightened taper ring, place the unloading bolts in the corresponding unloading tap hole in the middle ring, tighten and press in proper order. Separate the tightening taper ring with the inside and outside taper bushes from the other side.

D type NSPT LOCK can be easily disassembled after the above two steps.

Conversion: 1 inch = 25.40mm


#### Conversion

1 ft-lbs. = 0.1382 kgf.m = 1.3550 N.m  
1 Psi = 0.0007 kgf/mm<sup>2</sup> = 0.0069 Mpa

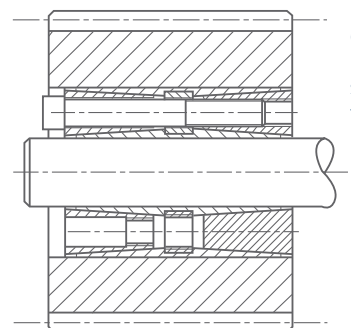


Conventional installation.  
For the usage of ordinary  
situation and general power  
transmission

Used in pairs, Suitable for the usage of greater power  
transmission

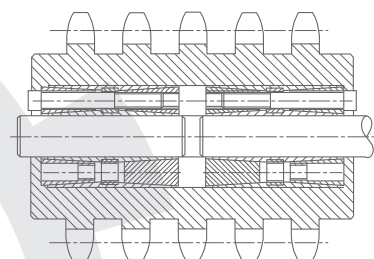

Mounted with shaft sleeves to connect  
transmission between two shafts. They  
have the same function as couplings

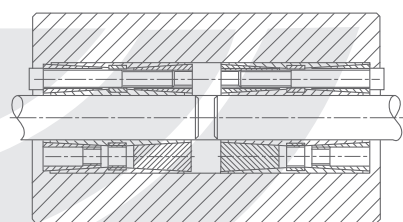

While installed with cams,  
the position and angle of  
the cams can be adjusted  
accordingly

