


HTP Timing pulley

SB
stock
ore

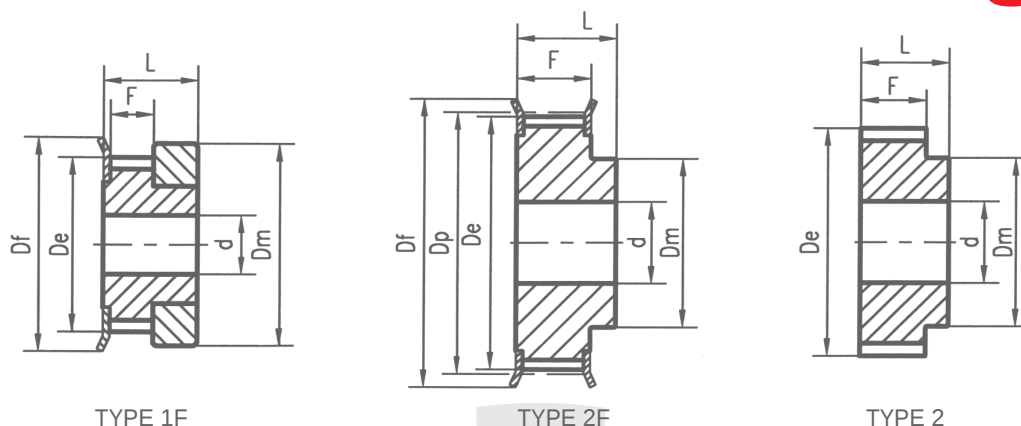

HTP 3M-06

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
10-3M-06F	1F	10	0.376	0.346	33/64	33/64	9/32	9/16	1/8
12-3M-06F	1F	12	0.451	0.421	19/32	19/32	9/32	9/16	3/16
14-3M-06F	1F	14	0.526	0.496	21/32	21/32	9/32	9/16	3/16
15-3M-06F	1F	15	0.564	0.534	11/16	11/16	9/32	9/16	3/16
16-3M-06F	2F	16	0.602	0.572	23/32	13/32	25/64	11/16	1/4
18-3M-06F	2F	18	0.677	0.647	49/64	7/16	25/64	11/16	1/4
20-3M-06F	2F	20	0.752	0.722	29/32	17/32	25/64	11/16	1/4
21-3M-06F	2F	21	0.789	0.759	63/64	9/16	25/64	11/16	1/4
22-3M-06F	2F	22	0.827	0.797	63/64	9/16	25/64	11/16	1/4
24-3M-06F	2F	24	0.902	0.872	63/64	9/16	25/64	11/16	1/4
26-3M-06F	2F	26	0.978	0.948	13/32	11/16	25/64	11/16	1/4
28-3M-06F	2F	28	1.053	1.023	11/4	11/16	25/64	11/16	1/4
30-3M-06F	2F	30	1.124	1.098	11/4	25/32	25/64	11/16	1/4
32-3M-06F	2F	32	1.203	1.173	17/16	7/8	25/64	11/16	1/4
36-3M-06F	2F	36	1.353	1.324	11/2	11/32	13/32	45/64	1/4
40-3M-06F	2F	40	1.504	1.474	111/16	13/32	13/32	45/64	1/4
44-3M-06F	2F	44	1.654	1.624	17/8	19/32	13/32	45/64	1/4
48-3M-06	2	48	1.805	1.775	—	19/32	13/32	47/64	3/8
60-3M-06	2	60	2.256	2.226	—	19/32	13/32	47/64	3/8
72-3M-06	2	72	2.707	2.677	—	19/32	13/32	47/64	3/8


HTP 3M-09

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
10-3M-09F	1F	10	0.376	0.346	33/64	33/64	13/32	11/16	1/8
12-3M-09F	1F	12	0.451	0.421	19/32	19/32	13/32	11/16	3/16
14-3M-09F	1F	14	0.526	0.496	21/32	21/32	13/32	11/16	3/16
15-3M-09F	1F	15	0.564	0.534	11/16	11/16	13/32	11/16	3/16
16-3M-09F	2F	16	0.602	0.572	23/32	13/32	33/64	13/16	1/4
18-3M-09F	2F	18	0.677	0.647	49/64	7/16	33/64	13/16	1/4
20-3M-09F	2F	20	0.752	0.722	29/32	17/32	33/64	13/16	1/4
21-3M-09F	2F	21	0.789	0.759	63/64	9/16	33/64	13/16	1/4
22-3M-09F	2F	22	0.827	0.797	63/64	9/16	33/64	13/16	1/4
24-3M-09F	2F	24	0.902	0.872	63/64	9/16	33/64	13/16	1/4
26-3M-09F	2F	26	0.978	0.948	13/32	11/16	33/64	13/16	1/4
28-3M-09F	2F	28	1.053	1.023	11/4	11/16	33/64	13/16	1/4
30-3M-09F	2F	30	1.124	1.098	11/4	25/32	33/64	13/16	1/4
32-3M-09F	2F	32	1.203	1.173	17/16	7/8	33/64	13/16	1/4
36-3M-09F	2F	36	1.353	1.324	11/2	11/32	17/32	7/8	1/4
40-3M-09F	2F	40	1.504	1.474	111/16	13/32	17/32	7/8	1/4
44-3M-09F	2F	44	1.654	1.624	17/8	19/32	17/32	7/8	1/4
48-3M-09	2	48	1.805	1.775	—	19/32	17/32	7/8	3/8
60-3M-09	2	60	2.256	2.226	—	19/32	17/32	7/8	3/8
72-3M-09	2	72	2.707	2.677	—	19/32	17/32	7/8	3/8

HTP Timing pulley

SB
stock
ore

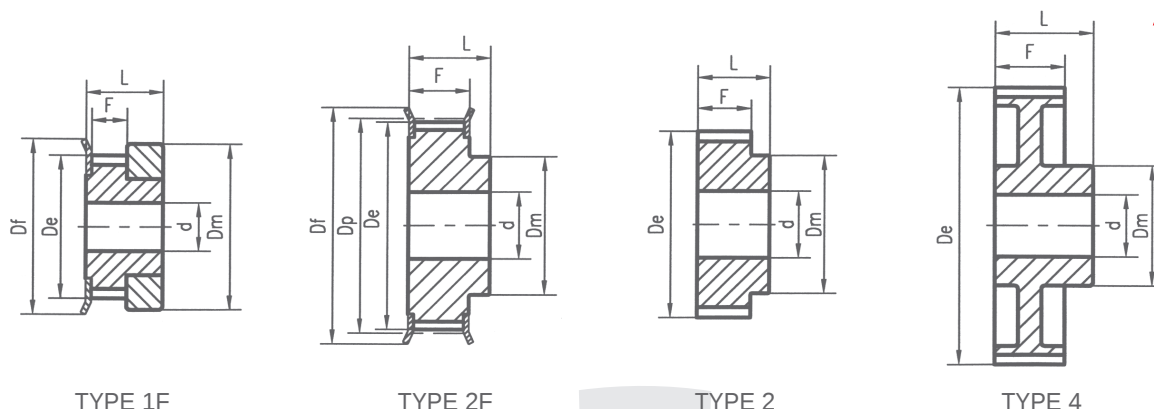

TYPE 1F

TYPE 2F

TYPE 2

TYPE 4

HTP 3M-15

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
10-3M-15F	1F	10	0.376	0.346	33/64	33/64	21/32	1	1/8
12-3M-15F	1F	12	0.451	0.421	19/32	19/32	21/32	1	3/16
14-3M-15F	1F	14	0.526	0.496	21/32	21/32	21/32	1	3/16
15-3M-15F	1F	15	0.564	0.534	11/16	11/16	21/32	1	3/16
16-3M-15F	2F	16	0.602	0.572	23/32	13/32	49/64	1	1/4
18-3M-15F	2F	18	0.677	0.647	49/64	7/16	49/64	1	1/4
20-3M-15F	2F	20	0.752	0.722	29/32	17/32	49/64	1	1/4
21-3M-15F	2F	21	0.789	0.759	63/64	9/16	49/64	1	1/4
22-3M-15F	2F	22	0.827	0.797	63/64	9/16	49/64	1	1/4
24-3M-15F	2F	24	0.902	0.872	63/64	9/16	49/64	1	1/4
26-3M-15F	2F	26	0.978	0.948	13/32	11/16	49/64	1	1/4
28-3M-15F	2F	28	1.053	1.023	11/4	11/16	49/64	1	1/4
30-3M-15F	2F	30	1.124	1.098	11/4	25/32	49/64	1	1/4
32-3M-15F	2F	32	1.203	1.173	17/16	7/8	49/64	1	1/4
36-3M-15F	2F	36	1.353	1.324	11/2	11/32	25/32	13/16	1/4
40-3M-15F	2F	40	1.504	1.474	111/16	13/32	25/32	13/16	1/4
44-3M-15F	2F	44	1.654	1.624	17/8	19/32	25/32	13/16	1/4
48-3M-15	2	48	1.805	1.775	-	19/32	25/32	13/16	3/8
60-3M-15	2	60	2.256	2.226	-	19/32	25/32	13/16	3/8
72-3M-15	2	72	2.707	2.677	-	19/32	25/32	13/16	3/8


HTP 5M-09

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
12-5M-09F	2F	12	0.752	0.707	15/16	7/16	9/16	3/4	1/4
14-5M-09F	2F	14	0.877	0.832	1	9/16	9/16	3/4	1/4
15-5M-09F	2F	15	0.940	0.895	11/8	5/8	9/16	3/4	1/4
16-5M-09F	2F	16	1.002	0.957	11/8	5/8	9/16	3/4	1/4
18-5M-09F	2F	18	1.128	1.083	11/4	25/32	9/16	3/4	1/4
20-5M-09F	2F	20	1.253	1.208	17/16	29/32	9/16	7/8	1/4
21-5M-09F	2F	21	1.316	1.271	11/2	15/16	9/16	7/8	1/4
22-5M-09F	2F	22	1.378	1.333	11/2	1	9/16	7/8	1/4
24-5M-09F	2F	24	1.504	1.459	111/16	11/16	9/16	7/8	1/4
26-5M-09F	2F	26	1.629	1.584	111/16	13/16	9/16	7/8	1/4
28-5M-09F	2F	28	1.754	1.709	17/8	13/16	9/16	7/8	1/4
30-5M-09F	2F	30	1.880	1.835	2	13/8	9/16	7/8	1/4
32-5M-09F	2F	32	2.005	1.960	21/8	11/2	9/16	7/8	3/8
36-5M-09F	2F	36	2.256	2.211	23/8	11/2	9/16	7/8	3/8
40-5M-09F	2F	40	2.506	2.461	23/4	11/2	9/16	7/8	3/8
44-5M-09	4	44	2.757	2.712	—	11/2	9/16	1	3/8
48-5M-09	4	48	3.007	2.962	—	17/8	9/16	1	3/8
60-5M-09	4	60	3.759	3.714	—	17/8	9/16	1	3/8
72-5M-09	4	72	4.511	4.466	—	17/8	9/16	1	3/8

HTP Timing pulley

S_{stock}
B_{ore}



TYPE 2F

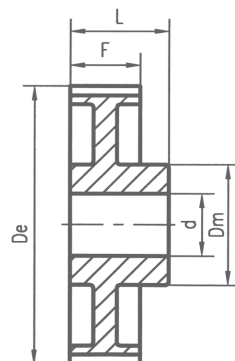

TYPE 4

HTP 5M-15

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
12-5M-15F	2F	12	0.752	0.707	15/16	7/16	13/16	1	1/4
14-5M-15F	2F	14	0.877	0.832	1	9/16	13/16	1	1/4
15-5M-15F	2F	15	0.940	0.895	1 1/8	5/8	13/16	1	1/4
16-5M-15F	2F	16	1.002	0.957	1 1/8	5/8	13/16	1	1/4
18-5M-15F	2F	18	1.128	1.083	1 1/4	25/32	13/16	1	1/4
20-5M-15F	2F	20	1.253	1.208	1 7/16	29/32	13/16	1	1/4
21-5M-15F	2F	21	1.316	1.271	1 1/2	15/16	13/16	1	1/4
22-5M-15F	2F	22	1.378	1.333	1 1/2	1	13/16	1	1/4
24-5M-15F	2F	24	1.504	1.459	1 11/16	1 1/16	13/16	1 3/16	1/4
26-5M-15F	2F	26	1.629	1.584	1 11/16	1 3/16	13/16	1 3/16	1/4
28-5M-15F	2F	28	1.754	1.709	1 7/8	1 3/16	13/16	1 3/16	1/4
30-5M-15F	2F	30	1.880	1.835	2	1 3/8	13/16	1 3/16	1/4
32-5M-15F	2F	32	2.005	1.960	2 1/8	1 1/2	13/16	1 3/16	5/16
36-5M-15F	2F	36	2.256	2.211	2 3/8	1 1/2	13/16	1 3/16	5/16
40-5M-15F	2F	40	2.506	2.461	2 3/4	1 1/2	13/16	1 3/16	5/16
44-5M-15	4	44	2.757	2.712	—	1 1/2	13/16	1 1/4	5/16
48-5M-15	4	48	3.007	2.962	—	2	13/16	1 1/4	5/16
60-5M-15	4	60	3.759	3.714	—	2	13/16	1 1/4	5/16
72-5M-15	4	72	4.511	4.466	—	2	13/16	1 1/4	5/16


HTP 5M-25

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	F	L	d
12-5M-25F	2F	12	0.752	0.707	15/16	7/16	17/32	1 13/32	1/4
14-5M-25F	2F	14	0.877	0.832	1	9/16	17/32	1 13/32	1/4
15-5M-25F	2F	15	0.940	0.895	1 1/8	5/8	17/32	1 13/32	1/4
16-5M-25F	2F	16	1.002	0.957	1 1/8	5/8	17/32	1 13/32	1/4
18-5M-25F	2F	18	1.128	1.083	1 1/4	25/32	17/32	1 13/32	1/4
20-5M-25F	2F	20	1.253	1.208	1 7/16	29/32	17/32	1 13/32	1/4
21-5M-25F	2F	21	1.316	1.271	1 1/2	15/16	17/32	1 1/2	1/4
22-5M-25F	2F	22	1.378	1.333	1 1/2	1	17/32	1 1/2	1/4
24-5M-25F	2F	24	1.504	1.459	1 11/16	1 1/16	17/32	1 1/2	1/4
26-5M-25F	2F	26	1.629	1.584	1 11/16	1 3/16	17/32	1 1/2	1/4
28-5M-25F	2F	28	1.754	1.709	1 7/8	1 3/16	17/32	1 1/2	1/4
30-5M-25F	2F	30	1.880	1.835	2	1 3/8	17/32	1 1/2	1/4
32-5M-25F	2F	32	2.005	1.960	2 1/8	1 1/2	17/32	1 1/2	5/16
36-5M-25F	2F	36	2.256	2.211	2 3/8	1 1/2	17/32	1 1/2	5/16
40-5M-25F	2F	40	2.506	2.461	2 3/4	1 1/2	17/32	1 1/2	5/16
44-5M-25	4	44	2.757	2.712	—	1 1/2	17/32	1 9/16	5/16
48-5M-25	4	48	3.007	2.962	—	2	17/32	1 9/16	5/16
60-5M-25	4	60	3.759	3.714	—	2	17/32	1 9/16	5/16
72-5M-25	4	72	4.511	4.466	—	2	17/32	1 9/16	5/16

HTP Timing pulley


**S_{tock}
B_{ore}**




TYPE 2F



TYPE 3F



TYPE 4



TYPE 5

HTP 8M-20

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
22-8M-20F	2F	22	2.206	2.152	23/8	111/16	—	11/8	11/2	1/2
24-8M-20F	2F	24	2.406	2.352	25/8	17/8	—	11/8	11/2	1/2
26-8M-20F	2F	26	2.607	2.553	23/4	2	—	11/8	11/2	1/2
28-8M-20F	2F	28	2.807	2.759	215/16	2	—	11/8	11/2	5/8
30-8M-20F	2F	30	3.008	2.958	39/32	23/16	—	11/8	11/2	5/8
32-8M-20F	2F	32	3.208	3.154	37/16	23/8	—	11/8	11/2	5/8
34-8M-20F	2F	34	3.409	3.355	39/16	23/4	—	11/8	11/2	5/8
36-8M-20F	2F	36	3.609	3.555	313/16	23/4	—	11/8	11/2	5/8
38-8M-20F	2F	38	3.810	3.756	4	215/16	—	11/8	11/2	5/8
40-8M-20F	2F	40	4.010	3.956	413/32	215/16	—	11/8	11/2	5/8
44-8M-20F	2F	44	4.411	4.357	43/4	215/16	—	11/8	11/2	5/8
48-8M-20F	2F	48	4.812	4.758	5	215/16	—	11/8	11/2	5/8
56-8M-20F	3F	56	5.614	5.560	515/16	33/16	45/8	11/8	11/2	5/8
64-8M-20F	3F	64	6.416	6.362	65/8	33/16	53/8	11/8	11/2	5/8
72-8M-20F	3F	72	7.218	7.164	79/16	33/16	63/16	11/8	11/2	5/8
80-8M-20	4	80	8.020	7.966	—	39/16	7	11/8	11/2	5/8
90-8M-20	4	90	9.023	8.969	—	39/16	8	11/8	11/2	5/8
112-8M-20	5	112	11.229	11.175	—	39/16	101/4	11/8	11/2	5/8
144-8M-20	5	144	14.437	14.383	—	39/16	133/8	11/8	11/2	3/4
168-8M-20	5	168	16.843	16.789	—	4	1513/16	11/8	11/2	3/4
192-8M-20	5	192	19.249	19.195	—	4	181/4	11/8	11/2	3/4

HTP 8M-30


NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
22-8M-30F	2F	22	2.206	2.152	23/8	111/16	—	11/2	115/16	1/2
24-8M-30F	2F	24	2.406	2.352	25/8	17/8	—	11/2	115/16	1/2
26-8M-30F	2F	26	2.607	2.553	23/4	2	—	11/2	115/16	1/2
28-8M-30F	2F	28	2.807	2.753	215/16	2	—	11/2	115/16	5/8
30-8M-30F	2F	30	3.008	2.954	39/32	23/16	—	11/2	115/16	5/8
32-8M-30F	2F	32	3.208	3.154	37/16	23/8	—	11/2	115/16	5/8
34-8M-30F	2F	34	3.409	3.355	39/16	23/4	—	11/2	115/16	5/8
36-8M-30F	2F	36	3.609	3.555	313/16	23/4	—	11/2	115/16	5/8
38-8M-30F	2F	38	3.810	3.756	4	215/16	—	11/2	115/16	5/8
40-8M-30F	2F	40	4.010	3.956	413/32	215/16	—	11/2	115/16	5/8
44-8M-30F	2F	44	4.411	4.357	43/4	215/16	—	11/2	115/16	5/8
48-8M-30F	2F	48	4.812	4.758	5	215/16	—	11/2	115/16	5/8
56-8M-30F	3F	56	5.614	5.560	515/16	33/16	45/8	11/2	115/16	5/8
64-8M-30F	3F	64	6.416	6.362	65/8	33/16	53/8	11/2	115/16	5/8
72-8M-30F	3F	72	7.218	7.164	79/16	33/16	63/16	11/2	115/16	5/8
80-8M-30	4	80	8.020	7.966	—	39/16	7	11/2	115/16	5/8
90-8M-30	4	90	9.023	8.969	—	39/16	8	11/2	115/16	5/8
112-8M-30	5	112	11.229	11.175	—	39/16	101/4	11/2	115/16	5/8
144-8M-30	5	144	14.437	14.383	—	39/16	133/8	11/2	115/16	3/4
168-8M-30	5	168	16.843	16.789	—	4	1513/16	11/2	115/16	3/4
192-8M-30	5	192	19.249	19.195	—	4	181/4	11/2	115/16	3/4


HTP Timing pulley



TYPE 2F



TYPE 6F



TYPE 7

HTP 8M-50

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
22-8M-50F	2F	22	2.206	2.152	23/8	111/16	—	23/8	23/4	1/2
24-8M-50F	2F	24	2.406	2.352	25/8	17/8	—	23/8	23/4	1/2
26-8M-50F	2F	26	2.607	2.553	23/4	2	—	23/8	23/4	1/2
28-8M-50F	2F	28	2.807	2.759	215/16	2	—	23/8	23/4	5/8
30-8M-50F	2F	30	3.008	2.958	39/32	23/16	—	23/8	23/4	5/8
32-8M-50F	2F	32	3.208	3.154	37/16	23/8	—	23/8	23/4	5/8
34-8M-50F	2F	34	3.409	3.355	39/16	23/4	—	23/8	23/4	5/8
36-8M-50F	2F	36	3.609	3.555	313/16	23/4	—	23/8	23/4	5/8
38-8M-50F	2F	38	3.810	3.756	4	215/16	—	23/8	23/4	5/8
40-8M-50F	2F	40	4.010	3.956	413/32	215/16	—	23/8	23/4	3/4
44-8M-50F	2F	44	4.411	4.357	43/4	215/16	—	23/8	23/4	3/4
48-8M-50F	2F	48	4.812	4.758	5	33/16	—	23/8	23/4	3/4
56-8M-50F	6F	56	5.614	5.560	515/16	39/16	45/8	23/8	23/8	3/4
64-8M-50F	6F	64	6.416	6.362	65/8	4	53/8	23/8	23/8	3/4
72-8M-50F	6F	72	7.218	7.164	79/16	4	63/16	23/8	23/8	3/4
80-8M-50	7	80	8.020	7.966	—	43/8	7	23/8	23/8	3/4
90-8M-50	7	90	9.023	8.969	—	43/8	8	23/8	23/8	3/4
112-8M-50	7	112	11.229	11.175	—	43/8	101/4	23/8	23/8	3/4
144-8M-50	7	144	14.437	14.383	—	43/8	133/8	23/8	23/8	3/4
168-8M-50	7	168	16.843	16.789	—	43/4	1513/16	23/8	23/8	3/4
192-8M-50	7	192	19.249	19.195	—	51/8	181/4	23/8	23/8	3/4

HTP 8M-85

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
22-8M-85F	2F	22	2.206	2.152	23/8	111/16	—	33/4	41/8	1/2
24-8M-85F	2F	24	2.406	2.352	25/8	17/8	—	33/4	41/8	1/2
26-8M-85F	2F	26	2.607	2.553	23/4	2	—	33/4	41/8	1/2
28-8M-85F	2F	28	2.807	2.759	215/16	2	—	33/4	41/8	5/8
30-8M-85F	2F	30	3.008	2.958	39/32	23/16	—	33/4	41/8	5/8
32-8M-85F	2F	32	3.208	3.154	37/16	23/8	—	33/4	41/8	5/8
34-8M-85F	2F	34	3.409	3.355	39/16	23/4	—	33/4	41/8	5/8
36-8M-85F	2F	36	3.609	3.555	313/16	23/4	—	33/4	41/8	5/8
38-8M-85F	2F	38	3.810	3.756	4	215/16	—	33/4	41/8	5/8
40-8M-85F	2F	40	4.010	3.956	413/32	215/16	—	33/4	41/8	5/8
44-8M-85F	2F	44	4.411	4.357	43/4	215/16	—	33/4	41/8	3/4
48-8M-85F	2F	48	4.812	4.758	5	33/16	—	33/4	41/8	3/4
56-8M-85F	2F	56	5.614	5.560	515/16	39/16	—	33/4	41/8	3/4
64-8M-85F	6F	64	6.416	6.362	65/8	4	53/8	33/4	33/4	3/4
72-8M-85F	6F	72	7.218	7.164	79/16	4	63/16	33/4	33/4	3/4
80-8M-85	6	80	8.020	7.966	—	43/8	7	33/4	33/4	3/4
90-8M-85	7	90	9.023	8.969	—	43/8	8	33/4	33/4	3/4
112-8M-85	7	112	11.229	11.175	—	43/8	101/4	33/4	33/4	1
144-8M-85	7	144	14.447	14.388	—	43/8	133/8	33/4	33/4	1
168-8M-85	7	168	16.818	16.789	—	43/4	1513/16	33/4	33/4	1
192-8M-85	7	192	19.249	19.195	—	51/8	181/4	33/4	33/4	1

HTP Timing pulley

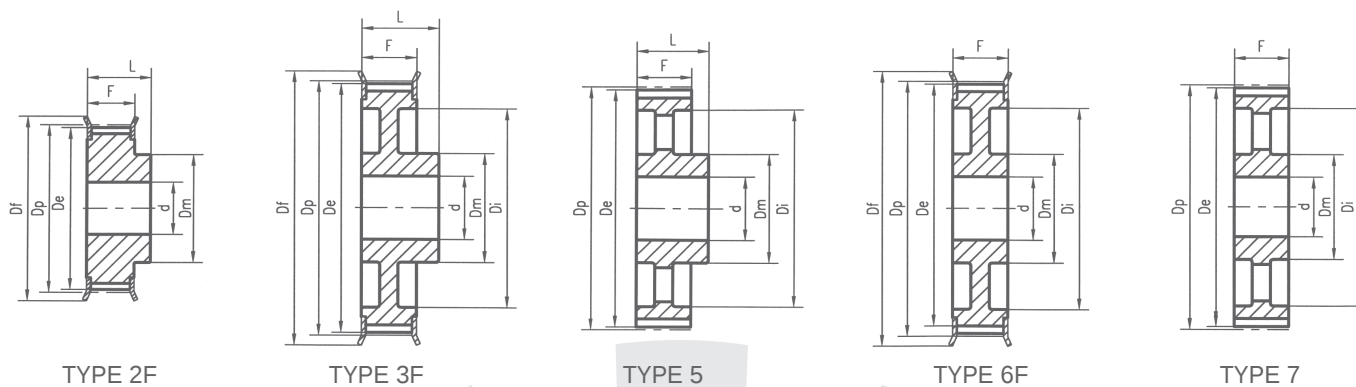

HTP 14M-40

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
28-14M-40F	2F	28	4.912	4.808	55/16	4	—	21/8	23/4	1
29-14M-40F	2F	29	5.088	4.983	57/8	4	—	21/8	23/4	1
30-14M-40F	2F	30	5.263	5.157	57/8	4	—	21/8	23/4	1
32-14M-40F	2F	32	5.614	5.507	65/8	4	—	21/8	23/4	1
34-14M-40F	2F	34	5.965	5.858	65/8	4	—	21/8	23/4	1
36-14M-40F	2F	36	6.316	6.208	67/8	4	—	21/8	23/4	1
38-14M-40F	2F	38	6.667	6.559	79/16	43/4	—	21/8	23/4	1
40-14M-40F	2F	40	7.018	6.909	77/8	43/4	—	21/8	23/4	1
44-14M-40F	2F	44	7.720	7.610	85/16	43/4	—	21/8	23/4	1
48-14M-40F	3F	48	8.421	8.311	87/8	55/16	63/4	21/8	23/4	1
56-14M-40F	3F	56	9.825	9.715	107/16	55/16	81/8	21/8	23/4	11/8
64-14M-40F	3F	64	11.229	11.119	115/8	55/16	99/16	21/8	23/4	11/8
72-14M-40	5	72	12.632	12.522	—	55/16	1015/16	21/8	23/4	11/8
80-14M-40	5	80	14.036	13.926	—	55/16	125/16	21/8	23/4	11/8
90-14M-40	5	90	15.790	15.680	—	55/16	141/16	21/8	23/4	11/8
112-14M-40	5	112	19.650	19.540	—	55/16	1715/16	21/8	23/4	11/8
144-14M-40	5	144	25.264	25.154	—	55/16	235/8	21/8	23/4	11/8
168-14M-40	5	168	29.475	29.365	—	55/16	273/4	21/8	23/4	11/8
192-14M-40	5	192	33.686	33.576	—	55/8	32	21/8	23/4	11/8
216-14M-40	5	216	37.896	37.786	—	515/16	363/16	21/8	23/4	11/8

HTP 14M-55


NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
28-14M-55F	2F	28	4.912	4.802	55/16	4	—	23/4	35/16	1
29-14M-55F	2F	29	5.088	4.983	57/8	4	—	23/4	35/16	1
30-14M-55F	2F	30	5.263	5.157	57/8	4	—	23/4	35/16	1
32-14M-55F	2F	32	5.614	5.507	65/8	4	—	23/4	35/16	1
34-14M-55F	2F	34	5.965	5.858	65/8	4	—	23/4	35/16	1
36-14M-55F	2F	36	6.316	6.208	67/8	4	—	23/4	35/16	1
38-14M-55F	2F	38	6.667	6.559	79/16	43/4	—	23/4	35/16	1
40-14M-55F	2F	40	7.018	6.909	77/8	43/4	—	23/4	35/16	1
44-14M-55F	2F	44	7.720	7.610	85/16	43/4	—	23/4	35/16	1
48-14M-55F	6F	48	8.421	8.311	87/8	55/16	63/4	23/4	23/4	1
56-14M-55F	6F	56	9.825	9.715	107/16	55/16	81/8	23/4	23/4	11/8
64-14M-55F	6F	64	11.229	11.119	115/8	55/16	99/16	23/4	23/4	11/8
72-14M-55	7	72	12.632	12.522	—	55/16	1015/16	23/4	23/4	11/8
80-14M-55	7	80	14.036	13.926	—	55/16	125/16	23/4	23/4	11/8
90-14M-55	7	90	15.790	15.680	—	55/16	141/16	23/4	23/4	11/8
112-14M-55	7	112	19.650	19.540	—	55/16	1715/16	23/4	23/4	11/8
144-14M-55	7	144	25.264	25.154	—	55/16	235/8	23/4	23/4	11/8
168-14M-5	7	168	29.475	29.365	—	55/16	273/4	23/4	23/4	11/8
192-14M-55	7	192	33.686	33.576	—	55/16	32	23/4	23/4	11/8
216-14M-55	7	216	37.896	37.786	—	515/16	363/16	23/4	23/4	11/8


HTP Timing pulley



TYPE 2F



TYPE 6F



TYPE 7

HTP 14M-85

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
28-14M-85F	2F	28	4.912	4.808	55/16	4	—	4	45/8	1
29-14M-85F	2F	29	5.088	4.983	57/8	4	—	4	45/8	1
30-14M-85F	2F	30	5.263	5.157	57/8	4	—	4	45/8	1
32-14M-85F	2F	32	5.614	5.507	65/8	4	—	4	45/8	1
34-14M-85F	2F	34	5.965	5.858	65/8	4	—	4	45/8	1
36-14M-85F	2F	36	6.316	6.208	67/8	4	—	4	45/8	1 1/4
38-14M-85F	2F	38	6.667	6.559	79/16	4 3/4	—	4	45/8	1 1/4
40-14M-85F	2F	40	7.018	6.909	77/8	55/16	—	4	45/8	1 1/4
44-14M-85F	2F	44	7.720	7.610	85/16	55/16	—	4	45/8	1 1/4
48-14M-85F	2F	48	8.421	8.311	87/8	515/16	—	4	45/8	1 1/4
56-14M-85F	6F	56	9.825	9.715	107/16	515/16	81/8	4	4	1 1/4
64-14M-85F	6F	64	11.229	11.119	115/8	515/16	99/16	4	4	1 1/4
72-14M-85	7	72	12.632	12.522	—	515/16	1015/16	4	4	1 1/4
80-14M-85	7	80	14.036	13.926	—	515/16	125/16	4	4	1 1/4
90-14M-85	7	90	15.790	15.680	—	515/16	141/16	4	4	1 1/4
112-14M-85	7	112	19.650	19.540	—	515/16	1715/16	4	4	1 1/4
144-14M-85	7	144	25.264	25.154	—	515/16	235/8	4	4	1 1/4
168-14M-85	7	168	29.475	29.365	—	515/16	273/4	4	4	1 1/4
192-14M-85	7	192	33.686	33.576	—	61/2	32	4	4	1 1/4
216-14M-85	7	216	37.896	37.786	—	61/2	363/16	4	4	1 1/4


HTP 14M-115

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
28-14M-115F	2F	28	4.912	4.802	55/16	4	—	5 1/4	5 13/16	1 1/4
29-14M-115F	2F	29	5.088	4.983	57/8	4	—	5 1/4	5 13/16	1 1/4
30-14M-115F	2F	30	5.263	5.157	57/8	4	—	5 1/4	5 13/16	1 1/4
32-14M-115F	2F	32	5.614	5.507	65/8	4	—	5 1/4	5 13/16	1 1/4
34-14M-115F	2F	34	5.965	5.858	65/8	4	—	5 1/4	5 13/16	1 1/4
36-14M-115F	2F	36	6.316	6.208	67/8	4	—	5 1/4	5 13/16	1 1/4
38-14M-115F	2F	38	6.667	6.559	79/16	4 3/4	—	5 1/4	5 13/16	1 1/4
40-14M-115F	2F	40	7.018	6.909	77/8	55/16	—	5 1/4	5 13/16	1 1/4
44-14M-115F	2F	44	7.720	7.610	85/16	55/16	—	5 1/4	5 13/16	1 1/4
48-14M-115F	2F	48	8.421	8.311	87/8	515/16	—	5 1/4	5 13/16	1 1/4
56-14M-115F	2F	56	9.825	9.715	107/16	515/16	—	5 1/4	5 13/16	1 1/4
64-14M-115F	6F	64	11.229	11.119	115/8	515/16	99/16	5 1/4	5 1/4	1 1/4
72-14M-115	7	72	12.632	12.522	—	515/16	1015/16	5 1/4	5 1/4	1 1/4
80-14M-115	7	80	14.036	13.926	—	515/16	1215/16	5 1/4	5 1/4	1 1/4
90-14M-115	7	90	15.790	15.680	—	515/16	141/16	5 1/4	5 1/4	1 1/4
112-14M-115	7	112	19.650	19.540	—	515/16	171/16	5 1/4	5 1/4	1 1/4
144-14M-115	7	144	25.264	25.154	—	515/16	235/8	5 1/4	5 1/4	1 1/4
168-14M-115	7	168	29.475	29.365	—	515/16	273/4	5 1/4	5 1/4	1 1/4
192-14M-115	7	192	33.686	33.576	—	61/2	32	5 1/4	5 1/4	1 1/4
216-14M-115	7	216	37.896	37.786	—	61/2	363/16	5 1/4	5 1/4	1 1/4

HTP Timing pulley

S_{tock}B_{ore}

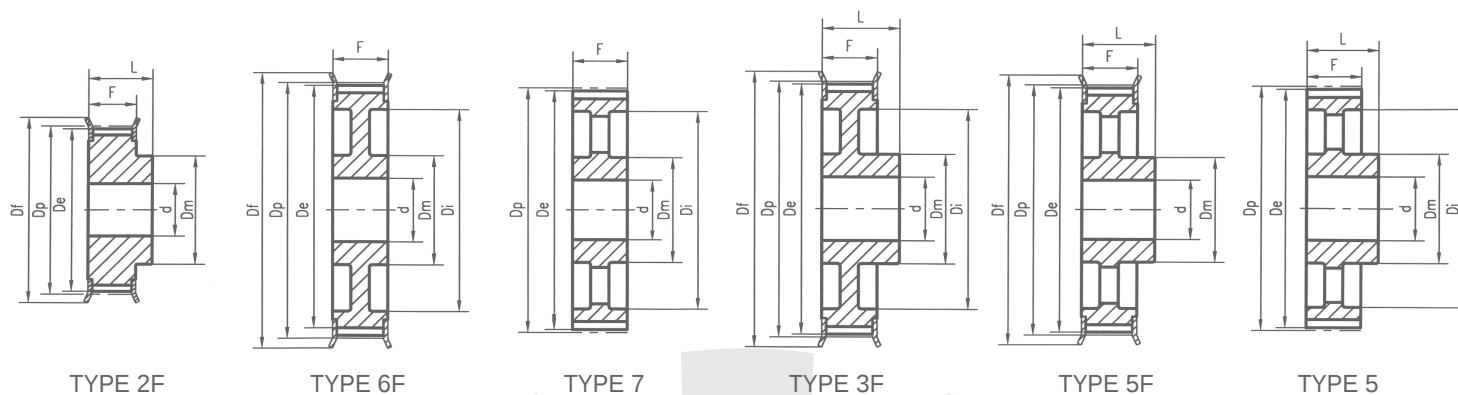

HTP 14M-170

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
28-14M-170F	2F	28	4.912	4.808	55/16	4	—	73/8	8	11/4
29-14M-170F	2F	29	5.088	4.983	57/8	4	—	73/8	8	11/4
30-14M-170F	2F	30	5.263	5.157	57/8	4	—	73/8	8	11/4
32-14M-170F	2F	32	5.614	5.507	65/8	4	—	73/8	8	11/4
34-14M-170F	2F	34	5.965	5.858	65/8	4	—	73/8	8	11/4
36-14M-170F	2F	36	6.316	6.208	67/8	43/4	—	73/8	8	11/4
38-14M-170F	2F	38	6.667	6.559	79/16	55/16	—	73/8	8	11/4
40-14M-170F	2F	40	7.018	6.909	77/8	55/16	—	73/8	8	11/4
44-14M-170F	2F	44	7.720	7.610	85/16	65/16	—	73/8	8	11/4
48-14M-170F	2F	48	8.421	8.311	87/8	65/16	—	73/8	8	11/4
56-14M-170F	2F	56	9.825	9.715	107/16	65/16	—	73/8	8	11/4
64-14M-170F	2F	64	11.229	11.119	115/8	71/16	—	73/8	8	11/4
72-14M-170	6	72	12.632	12.522	—	71/16	1015/16	73/8	73/8	11/4
80-14M-170	6	80	14.036	13.926	—	71/16	1215/16	73/8	73/8	11/4
90-14M-170	7	90	15.790	15.680	—	71/16	141/16	73/8	73/8	11/2
112-14M-170	7	112	19.650	19.540	—	77/8	171/16	73/8	73/8	11/2
144-14M-170	7	144	25.264	25.154	—	85/8	235/8	73/8	73/8	11/2
168-14M-170	7	168	29.475	29.365	—	85/8	273/4	73/8	73/8	11/2
192-14M-170	7	192	33.685	33.576	—	85/8	32	73/8	73/8	11/2
216-14M-170	7	216	37.896	37.786	—	85/8	363/16	73/8	73/8	11/2

HTP 20M-115

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
34-20M-115F	2F	34	8.522	8.352	97/16	61/2	—	53/8	65/8	11/4
36-20M-115F	2F	36	9.023	8.853	913/16	7	—	53/8	65/8	11/4
38-20M-115F	2F	38	9.524	9.354	107/16	71/8	—	53/8	65/8	11/4
40-20M-115F	2F	40	10.026	9.856	1013/16	8	—	53/8	65/8	11/4
44-20M-115F	2F	44	11.028	10.858	1113/16	81/4	—	53/8	65/8	11/4
48-20M-115F	2F	48	12.031	11.861	1213/16	9	—	53/8	65/8	11/4
52-20M-115F	2F	52	13.033	12.863	133/4	9	—	53/8	65/8	11/4
56-20M-115F	2F	56	14.036	13.866	143/4	9	—	53/8	65/8	11/4
60-20M-115F	3F	60	15.038	14.868	1515/16	9	121/2	53/8	65/8	11/2
64-20M-115F	3F	64	16.041	15.871	1615/16	9	131/2	53/8	65/8	11/2
68-20M-115F	3F	68	17.044	16.874	1715/16	9	147/16	53/8	65/8	11/2
72-20M-115F	5F	72	18.046	17.876	187/8	9	171/8	53/8	65/8	11/2
80-20M-115F	5F	80	20.051	19.881	207/8	11	171/2	53/8	65/8	11/2
90-20M-115F	5F	90	22.558	22.388	237/16	11	20	53/8	65/8	11/2
112-20M-115	5	112	28.072	27.902	—	11	251/2	53/8	65/8	11/2
144-20M-115	5	144	36.092	35.922	—	1113/16	331/2	53/8	65/8	13/4
168-20M-115	5	168	42.108	41.937	—	1113/16	391/2	53/8	65/8	13/4
192-20M-115	5	192	48.123	47.953	—	1113/16	451/2	53/8	65/8	17/8
216-20M-115	5	216	54.138	53.968	—	1113/16	511/8	53/8	65/8	17/8

HTP Timing pulley

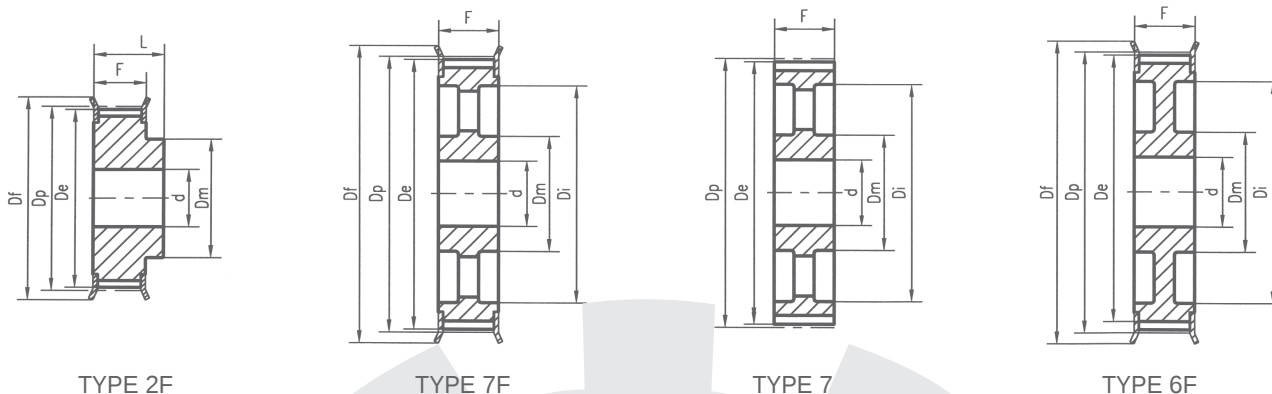

HTP 20M-170

NSPT Standard


SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
34-20M-170F	2F	34	8.522	8.352	9 ⁷ / ₁₆	6 ¹ / ₂	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
36-20M-170F	2F	36	9.023	8.853	9 ¹³ / ₁₆	7	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
38-20M-170F	2F	38	9.524	9.354	10 ⁷ / ₁₆	7 ¹ / ₈	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
40-20M-170F	2F	40	10.026	9.856	10 ¹³ / ₁₆	8	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
44-20M-170F	2F	44	11.028	10.858	11 ¹³ / ₁₆	8 ¹ / ₄	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
48-20M-170F	2F	48	12.031	11.861	12 ¹³ / ₁₆	9	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
52-20M-170F	2F	52	13.033	12.863	13 ³ / ₄	11	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
56-20M-170F	2F	56	14.036	13.866	14 ³ / ₄	11	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₄
60-20M-170F	2F	60	15.038	14.868	15 ¹⁵ / ₁₆	11	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₂
64-20M-170F	2F	64	16.041	15.871	16 ¹⁵ / ₁₆	11	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₂
68-20M-170F	2F	68	17.044	16.874	17 ¹⁵ / ₁₆	11	—	7 ¹ / ₂	8 ³ / ₄	1 ¹ / ₂
72-20M-170F	7F	72	18.046	17.876	18 ⁷ / ₈	11	17 ¹ / ₈	7 ¹ / ₂	7 ¹ / ₂	1 ¹ / ₂
80-20M-170F	7F	80	20.051	19.881	20 ⁷ / ₈	11	17 ¹ / ₂	7 ¹ / ₂	7 ¹ / ₂	1 ¹ / ₂
90-20M-170F	7F	90	22.558	22.388	23 ⁷ / ₁₆	11	20	7 ¹ / ₂	7 ¹ / ₂	1 ¹ / ₂
112-20M-170	7	112	28.072	27.902	—	11 ¹³ / ₁₆	25 ¹ / ₂	7 ¹ / ₂	7 ¹ / ₂	1 ¹ / ₂
144-20M-170	7	144	36.092	35.922	—	11 ¹³ / ₁₆	33 ¹ / ₂	7 ¹ / ₂	7 ¹ / ₂	1 ³ / ₄
168-20M-170	7	168	42.108	41.937	—	13 ³ / ₄	39 ¹ / ₂	7 ¹ / ₂	7 ¹ / ₂	1 ³ / ₄
192-20M-170	7	192	48.123	47.953	—	13 ³ / ₄	45 ¹ / ₂	7 ¹ / ₂	7 ¹ / ₂	1 ⁷ / ₈
216-20M-170	7	216	54.138	53.968	—	13 ³ / ₄	51 ¹ / ₈	7 ¹ / ₂	7 ¹ / ₂	1 ⁷ / ₈

HTP 20M-230

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
38-20M-230F	2F	38	9.524	9.354	10 ⁷ / ₁₆	7 ¹ / ₈	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
40-20M-230F	2F	40	10.026	9.856	10 ¹³ / ₁₆	8	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
44-20M-230F	2F	44	11.028	10.858	11 ¹³ / ₁₆	8 ¹ / ₄	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
48-20M-230F	2F	48	12.031	11.861	12 ¹³ / ₁₆	9	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
52-20M-230F	2F	52	13.033	12.863	13 ³ / ₄	11	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
56-20M-230F	2F	56	14.036	13.866	14 ³ / ₄	11	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
60-20M-230F	2F	60	15.038	14.868	15 ¹⁵ / ₁₆	11	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
64-20M-230F	2F	64	16.041	15.871	16 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
68-20M-230F	2F	68	17.044	16.874	17 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
72-20M-230F	2F	72	18.046	17.876	18 ⁷ / ₈	11 ¹³ / ₁₆	—	9 ⁷ / ₈	11 ¹ / ₈	1 ¹ / ₂
80-20M-230F	6F	80	20.051	19.881	20 ⁷ / ₈	11 ¹³ / ₁₆	17 ¹ / ₂	9 ⁷ / ₈	9 ⁷ / ₈	1 ¹ / ₂
90-20M-230F	7F	90	22.558	22.388	23 ⁷ / ₁₆	11 ¹³ / ₁₆	20	9 ⁷ / ₈	9 ⁷ / ₈	1 ¹ / ₂
112-20M-230	7	112	28.072	27.902	—	11 ¹³ / ₁₆	25 ¹ / ₂	9 ⁷ / ₈	9 ⁷ / ₈	1 ¹ / ₂
144-20M-230	7	144	36.092	35.922	—	13 ³ / ₄	33 ¹ / ₂	9 ⁷ / ₈	9 ⁷ / ₈	1 ³ / ₄
168-20M-230	7	168	42.108	41.937	—	13 ³ / ₄	39 ¹ / ₂	9 ⁷ / ₈	9 ⁷ / ₈	1 ³ / ₄
192-20M-230	7	192	48.123	47.953	—	15 ³ / ₄	45 ¹ / ₂	9 ⁷ / ₈	9 ⁷ / ₈	1 ⁷ / ₈
216-20M-230	7	216	54.138	53.968	—	15 ³ / ₄	51 ¹ / ₈	9 ⁷ / ₈	9 ⁷ / ₈	1 ⁷ / ₈

HTP Timing pulley

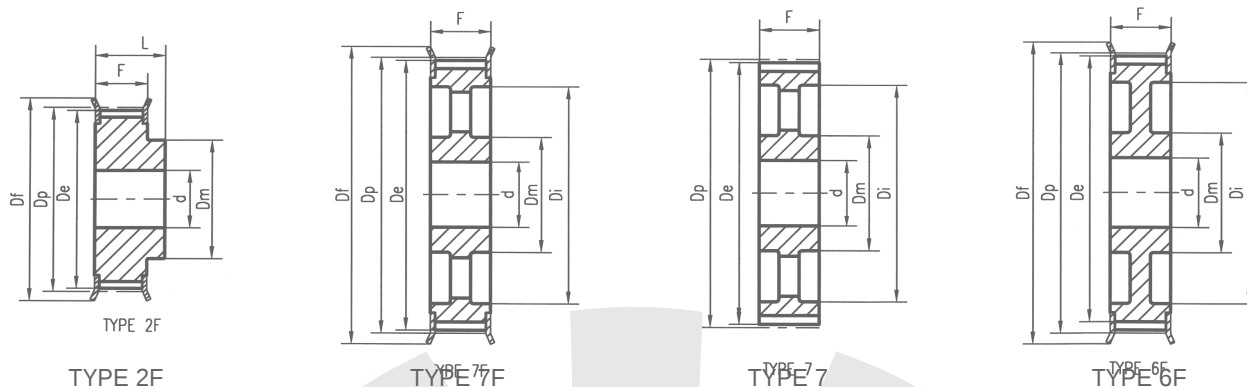

HTP 20M-290

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
52-20M-290F	2F	52	13.033	12.863	13 ³ / ₄	11	—	12 ¹ / ₄	13 ¹ / ₂	1 ¹ / ₂
56-20M-290F	2F	56	14.036	13.866	14 ³ / ₄	11	—	12 ¹ / ₄	13 ¹ / ₂	1 ¹ / ₂
60-20M-290F	2F	60	15.038	14.868	15 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	12 ¹ / ₄	13 ¹ / ₂	1 ¹ / ₂
64-20M-290F	2F	64	16.041	15.871	16 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	12 ¹ / ₄	13 ¹ / ₂	1 ¹ / ₂
68-20M-290F	2F	68	17.044	16.874	17 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	12 ¹ / ₄	13 ¹ / ₂	1 ¹ / ₂
72-20M-290F	7F	72	18.046	17.876	18 ⁷ / ₈	11 ¹³ / ₁₆	—	12 ¹ / ₄	13 ¹ / ₂	1 ³ / ₄
80-20M-290F	7F	80	20.051	19.881	20 ⁷ / ₈	11 ¹³ / ₁₆	—	12 ¹ / ₄	13 ¹ / ₂	1 ³ / ₄
90-20M-290F	6F	90	22.558	22.388	23 ⁷ / ₁₆	11 ¹³ / ₁₆	20	12 ¹ / ₄	12 ¹ / ₄	1 ³ / ₄
112-20M-290	7	112	28.072	27.902	—	13 ³ / ₄	25 ¹ / ₂	12 ¹ / ₄	12 ¹ / ₄	1 ⁷ / ₈
144-20M-290	7	144	36.092	35.922	—	13 ³ / ₄	33 ¹ / ₂	12 ¹ / ₄	12 ¹ / ₄	1 ⁷ / ₈
168-20M-290	7	168	42.108	41.937	—	15 ³ / ₄	39 ¹ / ₂	12 ¹ / ₄	12 ¹ / ₄	1 ⁷ / ₈
192-20M-290	7	192	48.123	47.953	—	15 ³ / ₄	45 ¹ / ₂	12 ¹ / ₄	12 ¹ / ₄	1 ⁷ / ₈
216-20M-290	7	216	54.138	53.968	—	15 ³ / ₄	51 ¹ / ₈	12 ¹ / ₄	12 ¹ / ₄	1 ⁷ / ₈



HTP 20M-340

NSPT Standard

SPCFCTN	TYPE	Z	Dp	De	Df	Dm	DI	F	L	d
52-20M-340F	2F	52	13.033	12.863	13 ³ / ₄	11	—	14 ¹ / ₄	15 ¹ / ₂	1 ¹ / ₂
56-20M-340F	2F	56	14.036	13.866	14 ³ / ₄	11	—	14 ¹ / ₄	15 ¹ / ₂	1 ¹ / ₂
60-20M-340F	2F	60	15.038	14.868	15 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	14 ¹ / ₄	15 ¹ / ₂	1 ¹ / ₂
64-20M-340F	2F	64	16.041	15.871	16 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	14 ¹ / ₄	15 ¹ / ₂	1 ³ / ₄
68-20M-340F	2F	68	17.044	16.874	17 ¹⁵ / ₁₆	11 ¹³ / ₁₆	—	14 ¹ / ₄	15 ¹ / ₂	1 ³ / ₄
72-20M-340F	2F	72	18.046	17.876	18 ⁷ / ₈	11 ¹³ / ₁₆	—	14 ¹ / ₄	15 ¹ / ₂	1 ³ / ₄
80-20M-340F	2F	80	20.051	19.881	20 ⁷ / ₈	11 ¹³ / ₁₆	—	14 ¹ / ₄	15 ¹ / ₂	1 ³ / ₄
90-20M-340F	6F	90	22.558	22.388	23 ⁷ / ₁₆	13 ³ / ₄	20	14 ¹ / ₄	15 ¹ / ₂	1 ⁷ / ₈
112-20M-340	7	112	28.072	27.902	—	13 ³ / ₄	25 ¹ / ₂	14 ¹ / ₄	14 ¹ / ₄	1 ⁷ / ₈
144-20M-340	7	144	36.092	35.922	—	15 ³ / ₄	33 ¹ / ₂	14 ¹ / ₄	14 ¹ / ₄	1 ⁷ / ₈
168-20M-340	7	168	42.108	41.937	—	15 ³ / ₄	39 ¹ / ₂	14 ¹ / ₄	14 ¹ / ₄	1 ⁷ / ₈
192-20M-340	7	192	48.123	47.953	—	16 ¹⁵ / ₁₆	45 ¹ / ₂	14 ¹ / ₄	14 ¹ / ₄	1 ⁷ / ₈
216-20M-340	7	216	54.138	53.968	—	16 ¹⁵ / ₁₆	51 ¹ / ₈	14 ¹ / ₄	14 ¹ / ₄	1 ⁷ / ₈

HTP *Standard toothed bars*

NSPT Standard

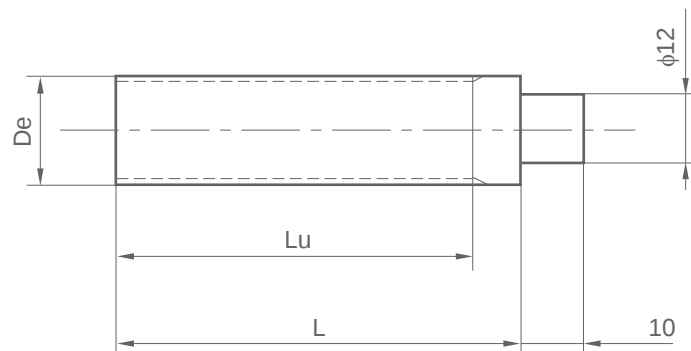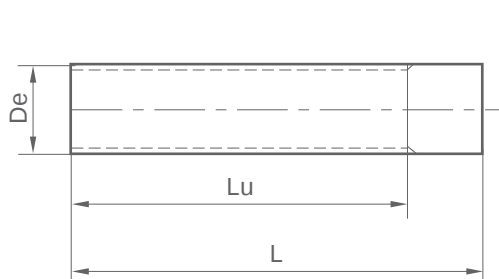

HTP-3M

SPCFCTN	Z	Dp	De	Lu	L
9-3M	9	0.338	0.308	3	4
10-3M	10	0.376	0.346	3	4
11-3M	11	0.413	0.383	3	4
12-3M	12	0.451	0.421	4	5
13-3M	13	0.489	0.459	4	5
14-3M	14	0.526	0.496	4	5
15-3M	15	0.564	0.534	4	5
16-3M	16	0.602	0.572	5	6
17-3M	17	0.639	0.609	5	6
18-3M	18	0.677	0.647	5	6
19-3M	19	0.714	0.684	5	6
20-3M	20	0.752	0.722	6	6 1/2
21-3M	21	0.789	0.759	6	6 1/2
22-3M	22	0.827	0.797	6	6 1/2
23-3M	23	0.865	0.835	6	6 1/2
24-3M	24	0.902	0.872	6	6 1/2
25-3M	25	0.940	0.910	6	6 1/2
26-3M	26	0.978	0.948	6	6 1/2
27-3M	27	1.015	0.985	6	6 1/2
28-3M	28	1.053	1.023	6	6 1/2
29-3M	29	1.090	1.060	6	6 1/2
30-3M	30	1.124	1.098	7	7 1/2
31-3M	31	1.165	1.135	7	7 1/2
32-3M	32	1.203	1.173	7	7 1/2
33-3M	33	1.242	1.212	7	7 1/2
34-3M	34	1.278	1.248	7	7 1/2
35-3M	35	1.316	1.286	7	7 1/2
36-3M	36	1.353	1.324	8	8
37-3M	37	1.391	1.361	8	8
38-3M	38	1.429	1.399	8	8
39-3M	39	1.466	1.436	8	8
40-3M	40	1.504	1.474	8	8
42-3M	42	1.579	1.549	8	8
44-3M	44	1.654	1.624	8	8
45-3M	45	1.692	1.662	8	8
48-3M	48	1.805	1.775	8	8
50-3M	50	1.880	1.850	8	8
52-3M	52	1.955	1.925	8	8
54-3M	54	2.023	2.000	8	8
56-3M	56	2.106	2.076	8	8
60-3M	60	2.256	2.226	8	8
62-3M	62	2.331	2.301	8	8
64-3M	64	2.406	2.376	8	8
66-3M	66	2.481	2.451	8	8
68-3M	68	2.557	2.527	8	8
70-3M	70	2.632	2.602	8	8
72-3M	72	2.707	2.679	8	8

HTP-5M

SPCFCTN	Z	Dp	De	Lu	L
12-5M	12	0.752	0.707	6	6 1/2
13-5M	13	0.815	0.770	6	6 1/2
14-5M	14	0.877	0.832	7	7 1/2
15-5M	15	0.940	0.895	7	7 1/2
16-5M	16	1.002	0.957	7	7 1/2
17-5M	17	1.065	1.020	7	7 1/2
18-5M	18	1.128	1.083	8	8
19-5M	19	1.191	1.146	8	8
20-5M	20	1.253	1.208	8	8
21-5M	21	1.316	1.271	8	8
22-5M	22	1.378	1.333	8	8
23-5M	23	1.441	1.396	8	8
24-5M	24	1.504	1.459	8	8
25-5M	25	1.567	1.522	8	8
26-5M	26	1.629	1.584	8	8
27-5M	27	1.692	1.647	8	8
28-5M	28	1.754	1.709	8	8
29-5M	29	1.817	1.772	8	8
30-5M	30	1.880	1.835	8	8
31-5M	31	1.943	1.898	8	8
32-5M	32	2.005	1.960	8	8
33-5M	33	2.068	2.023	8	8
34-5M	34	2.130	2.085	8	8
35-5M	35	2.193	2.148	8	8
36-5M	36	2.256	2.211	8	8
38-5M	38	2.381	2.336	8	8
40-5M	40	2.506	2.461	8	8
42-5M	42	2.632	2.587	8	8
44-5M	44	2.757	2.712	8	8
45-5M	45	2.820	2.775	8	8
48-5M	48	3.007	2.962	8	8
50-5M	50	3.133	3.088	8	8
54-5M	54	3.383	3.338	8	8
60-5M	60	3.759	3.714	8	8
62-5M	62	3.885	3.840	8	8
72-5M	72	4.511	4.466	8	8

When supplied in small or medium quantities, tooth bars can be made into various finished products upon customers' needs. Meanwhile, NSPT offer flanges used on relevant timing pulleys.